



SAFETY

HYGIENIC

COMFORT

DECOLUX™ SERENO

HOMOGENEOUS VINYL FLOORING




Unit 2309 Prestige Tower
F. Ortigas Jr. Rd. Ortigas Center
Pasig City, Philippines 1605
Landline : (632) 8635 0515
Mobile + 63 917 156 9669
www.obiasia.com

DECOLUX™ SERENO




HOMOGENEOUS VINYL
Size:2.0mm x 2m x 20m

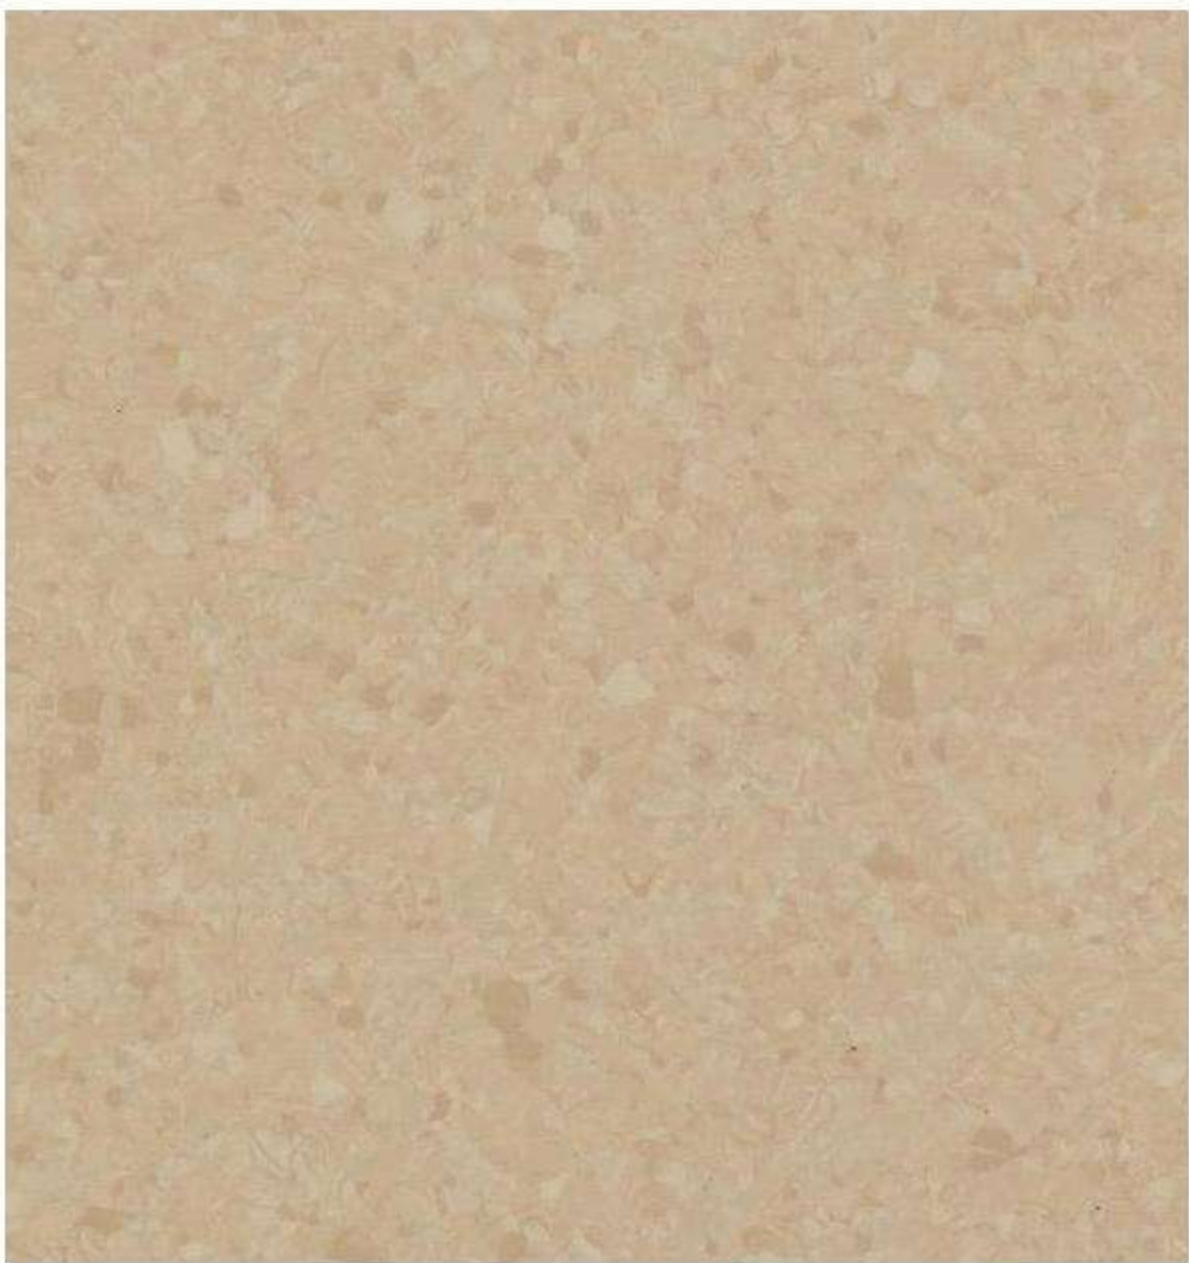

DS-6501 Dusty Cedar




DS-6502 Apricot Whisper

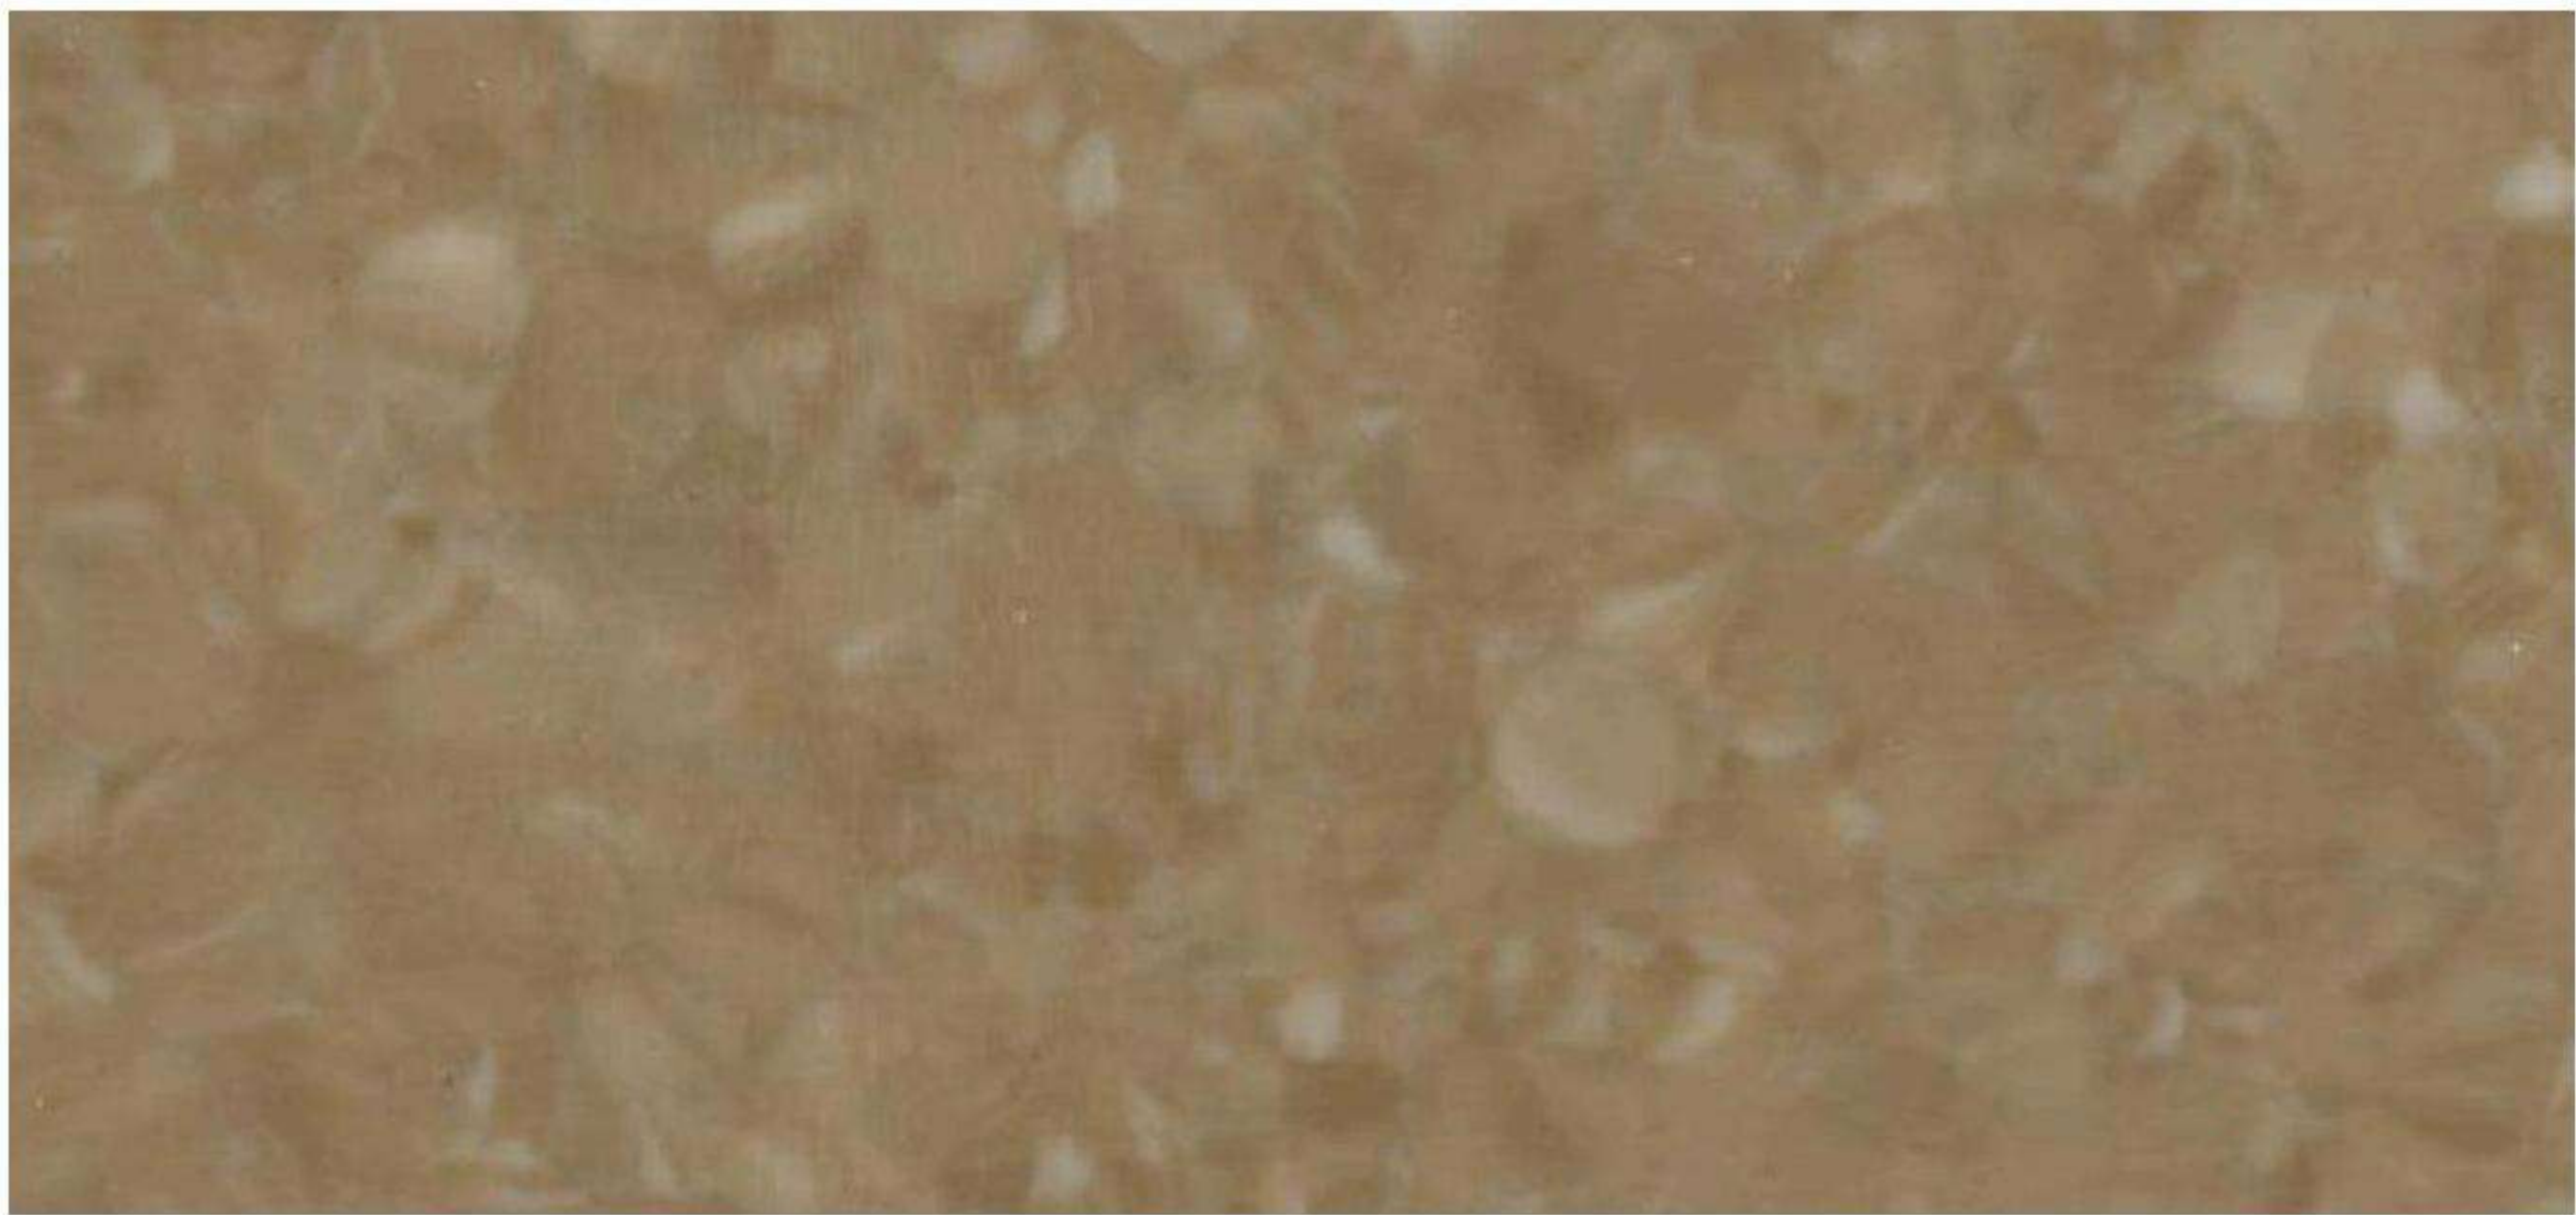


DS-6503 Tobacco




DS-6504 Saddle

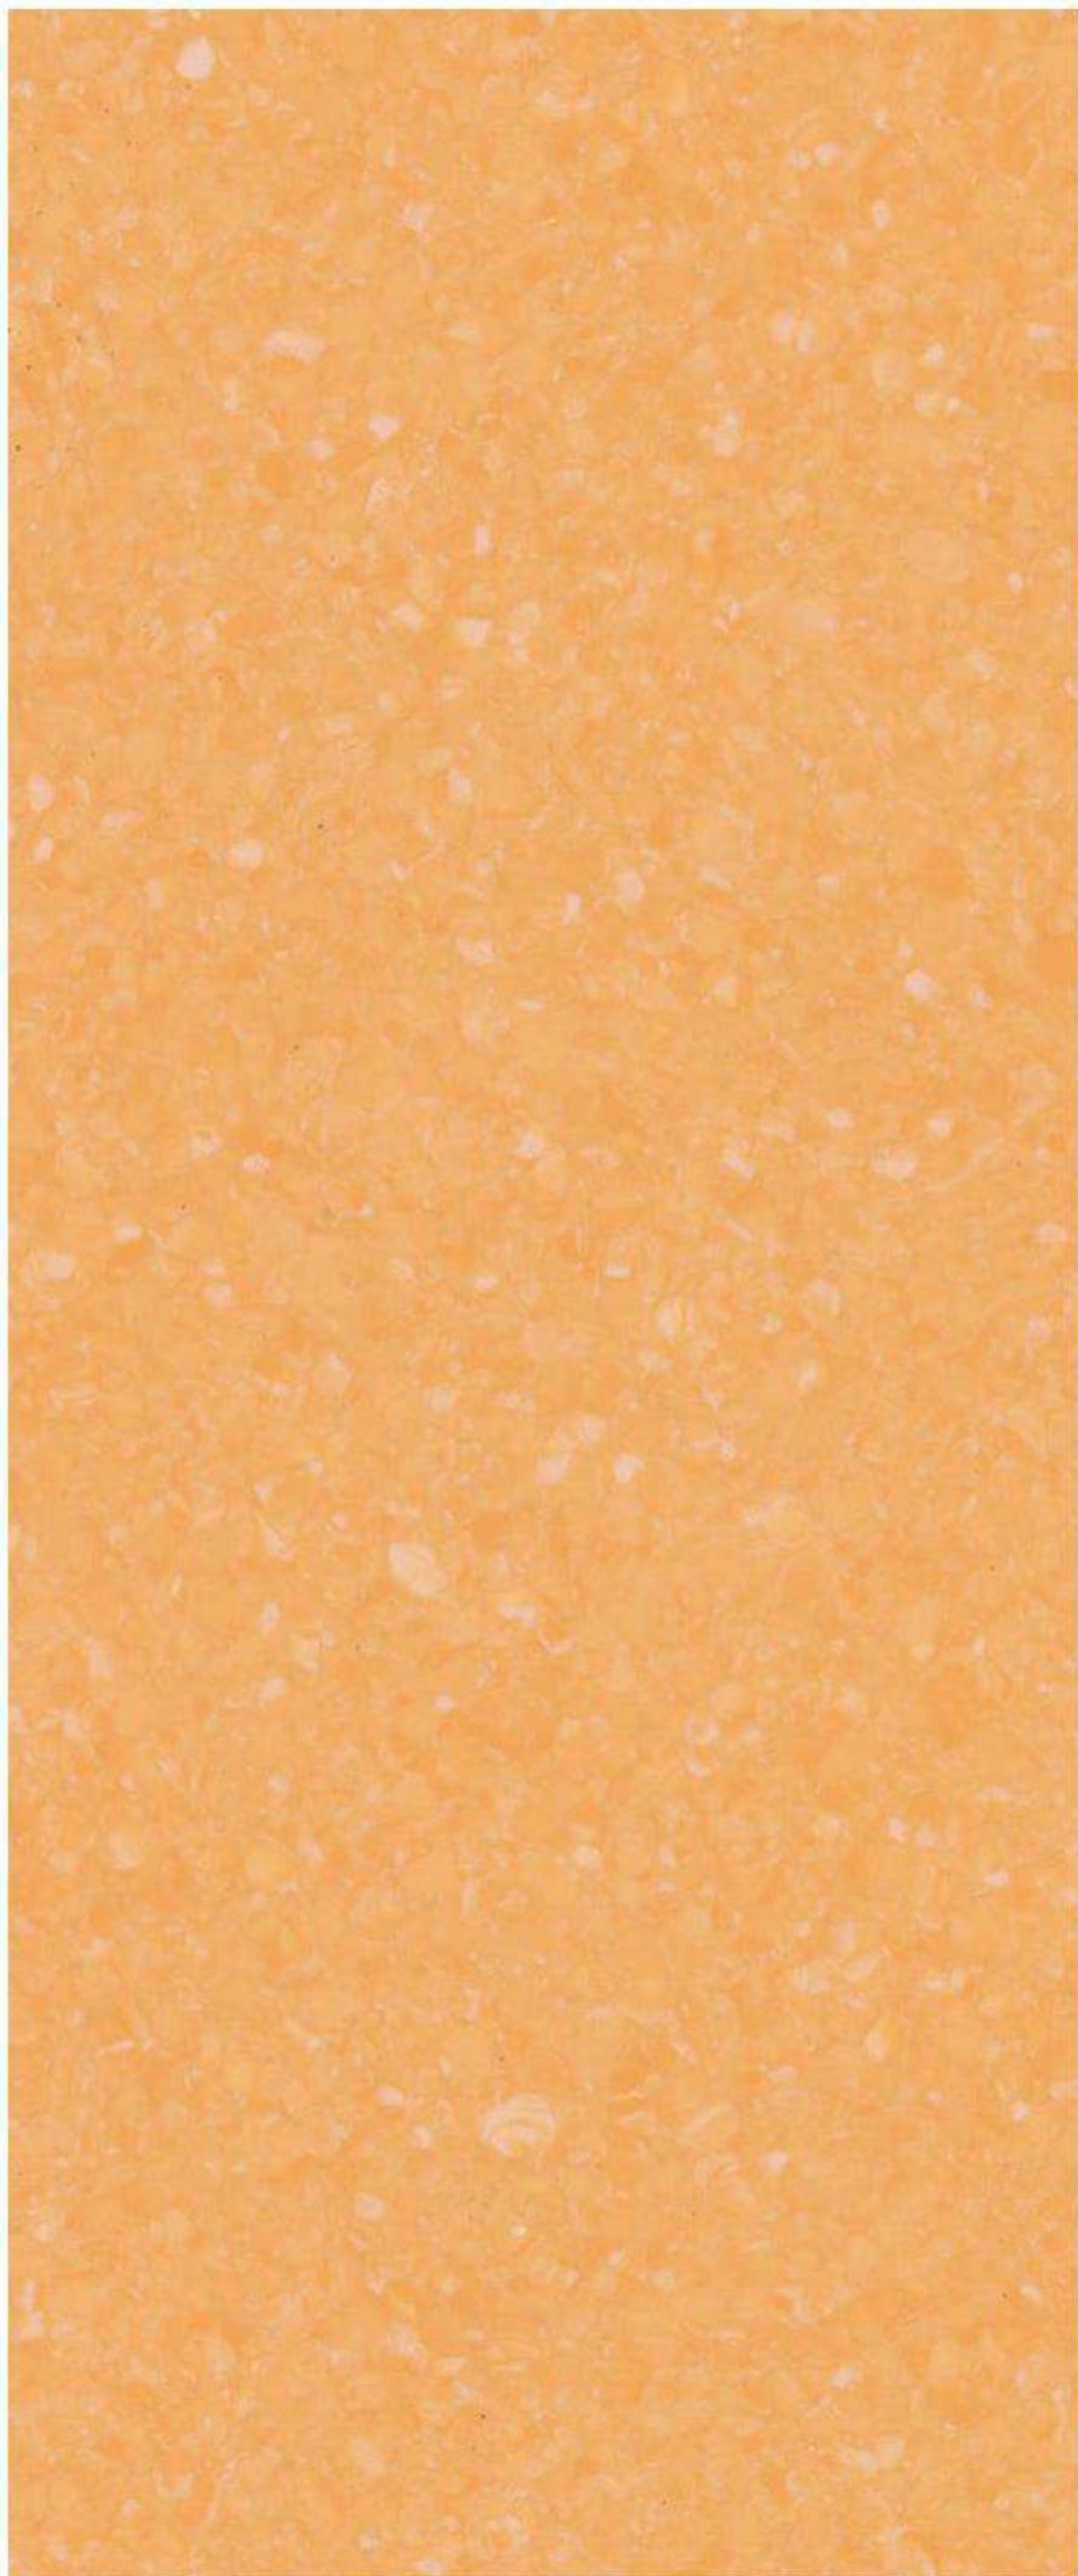

DS-6505 Holly lear

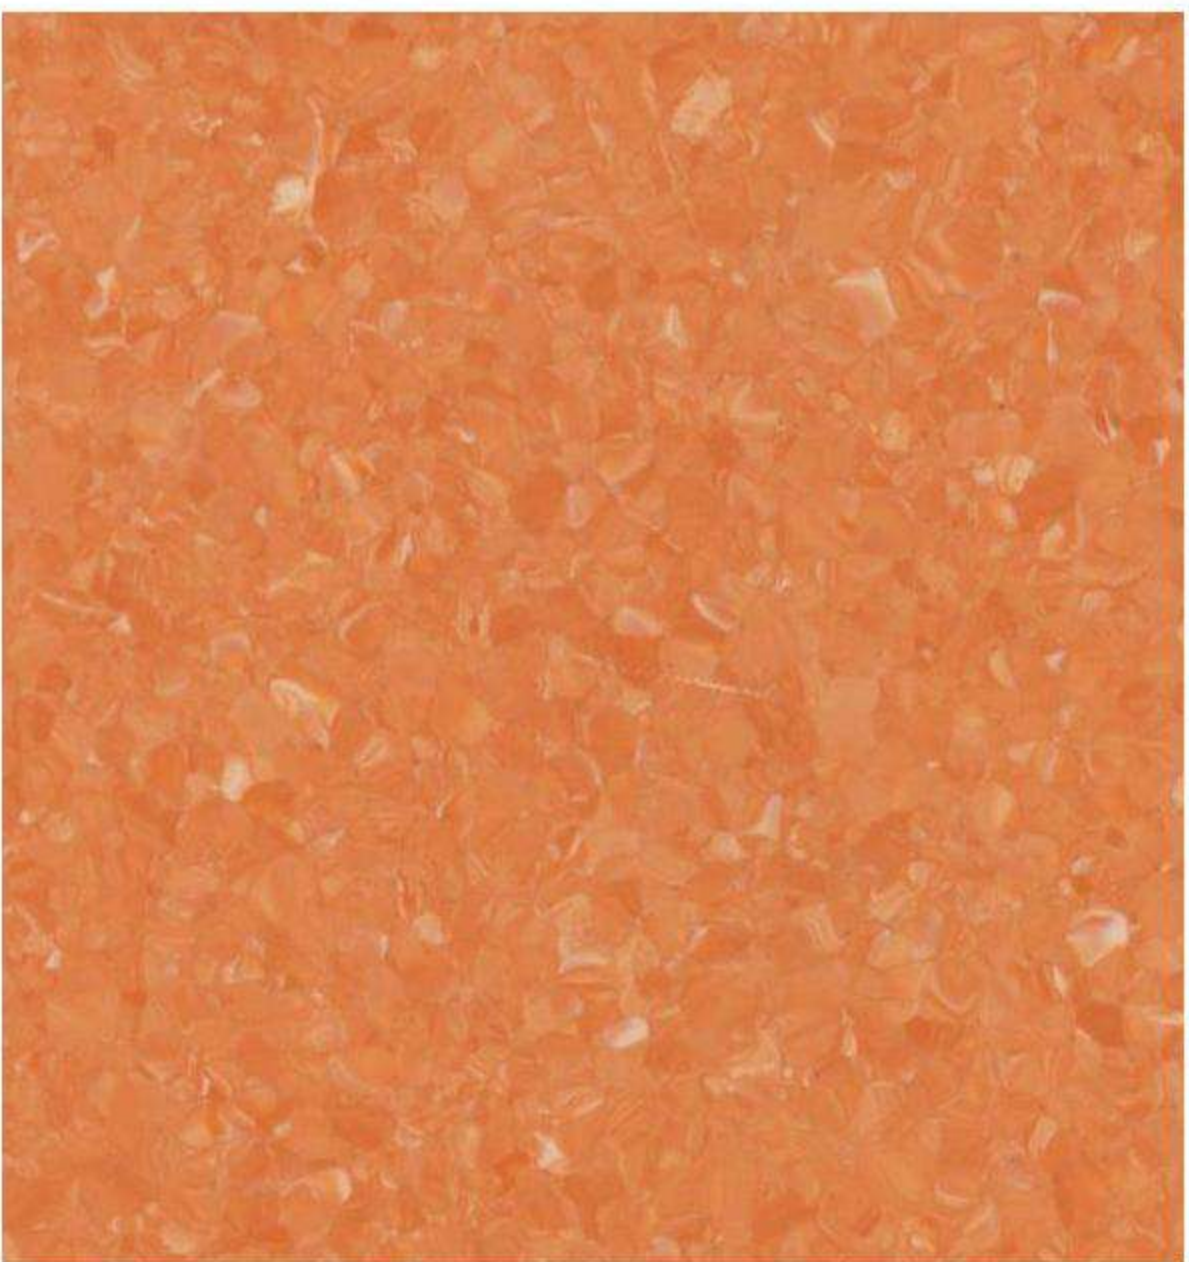

DS-6506 Tangerine Zest

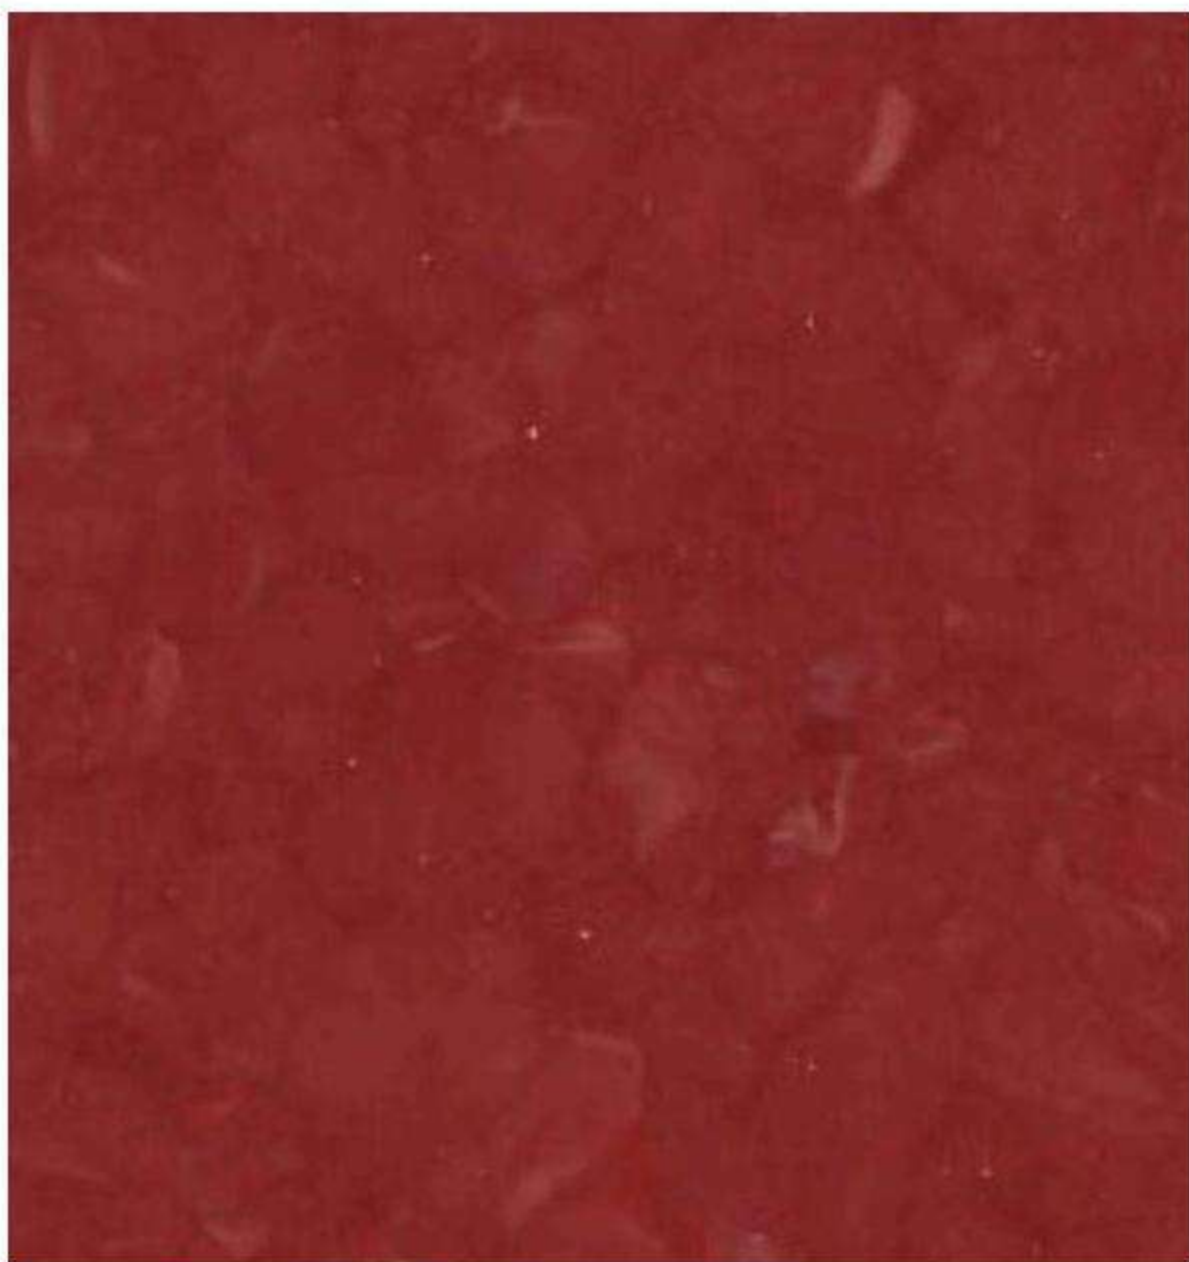


DS-6507 Roof Terracotta

DECOLUX™ SERENO



HOMOGENEOUS VINYL
Size:2.0mm x 2m x 20m

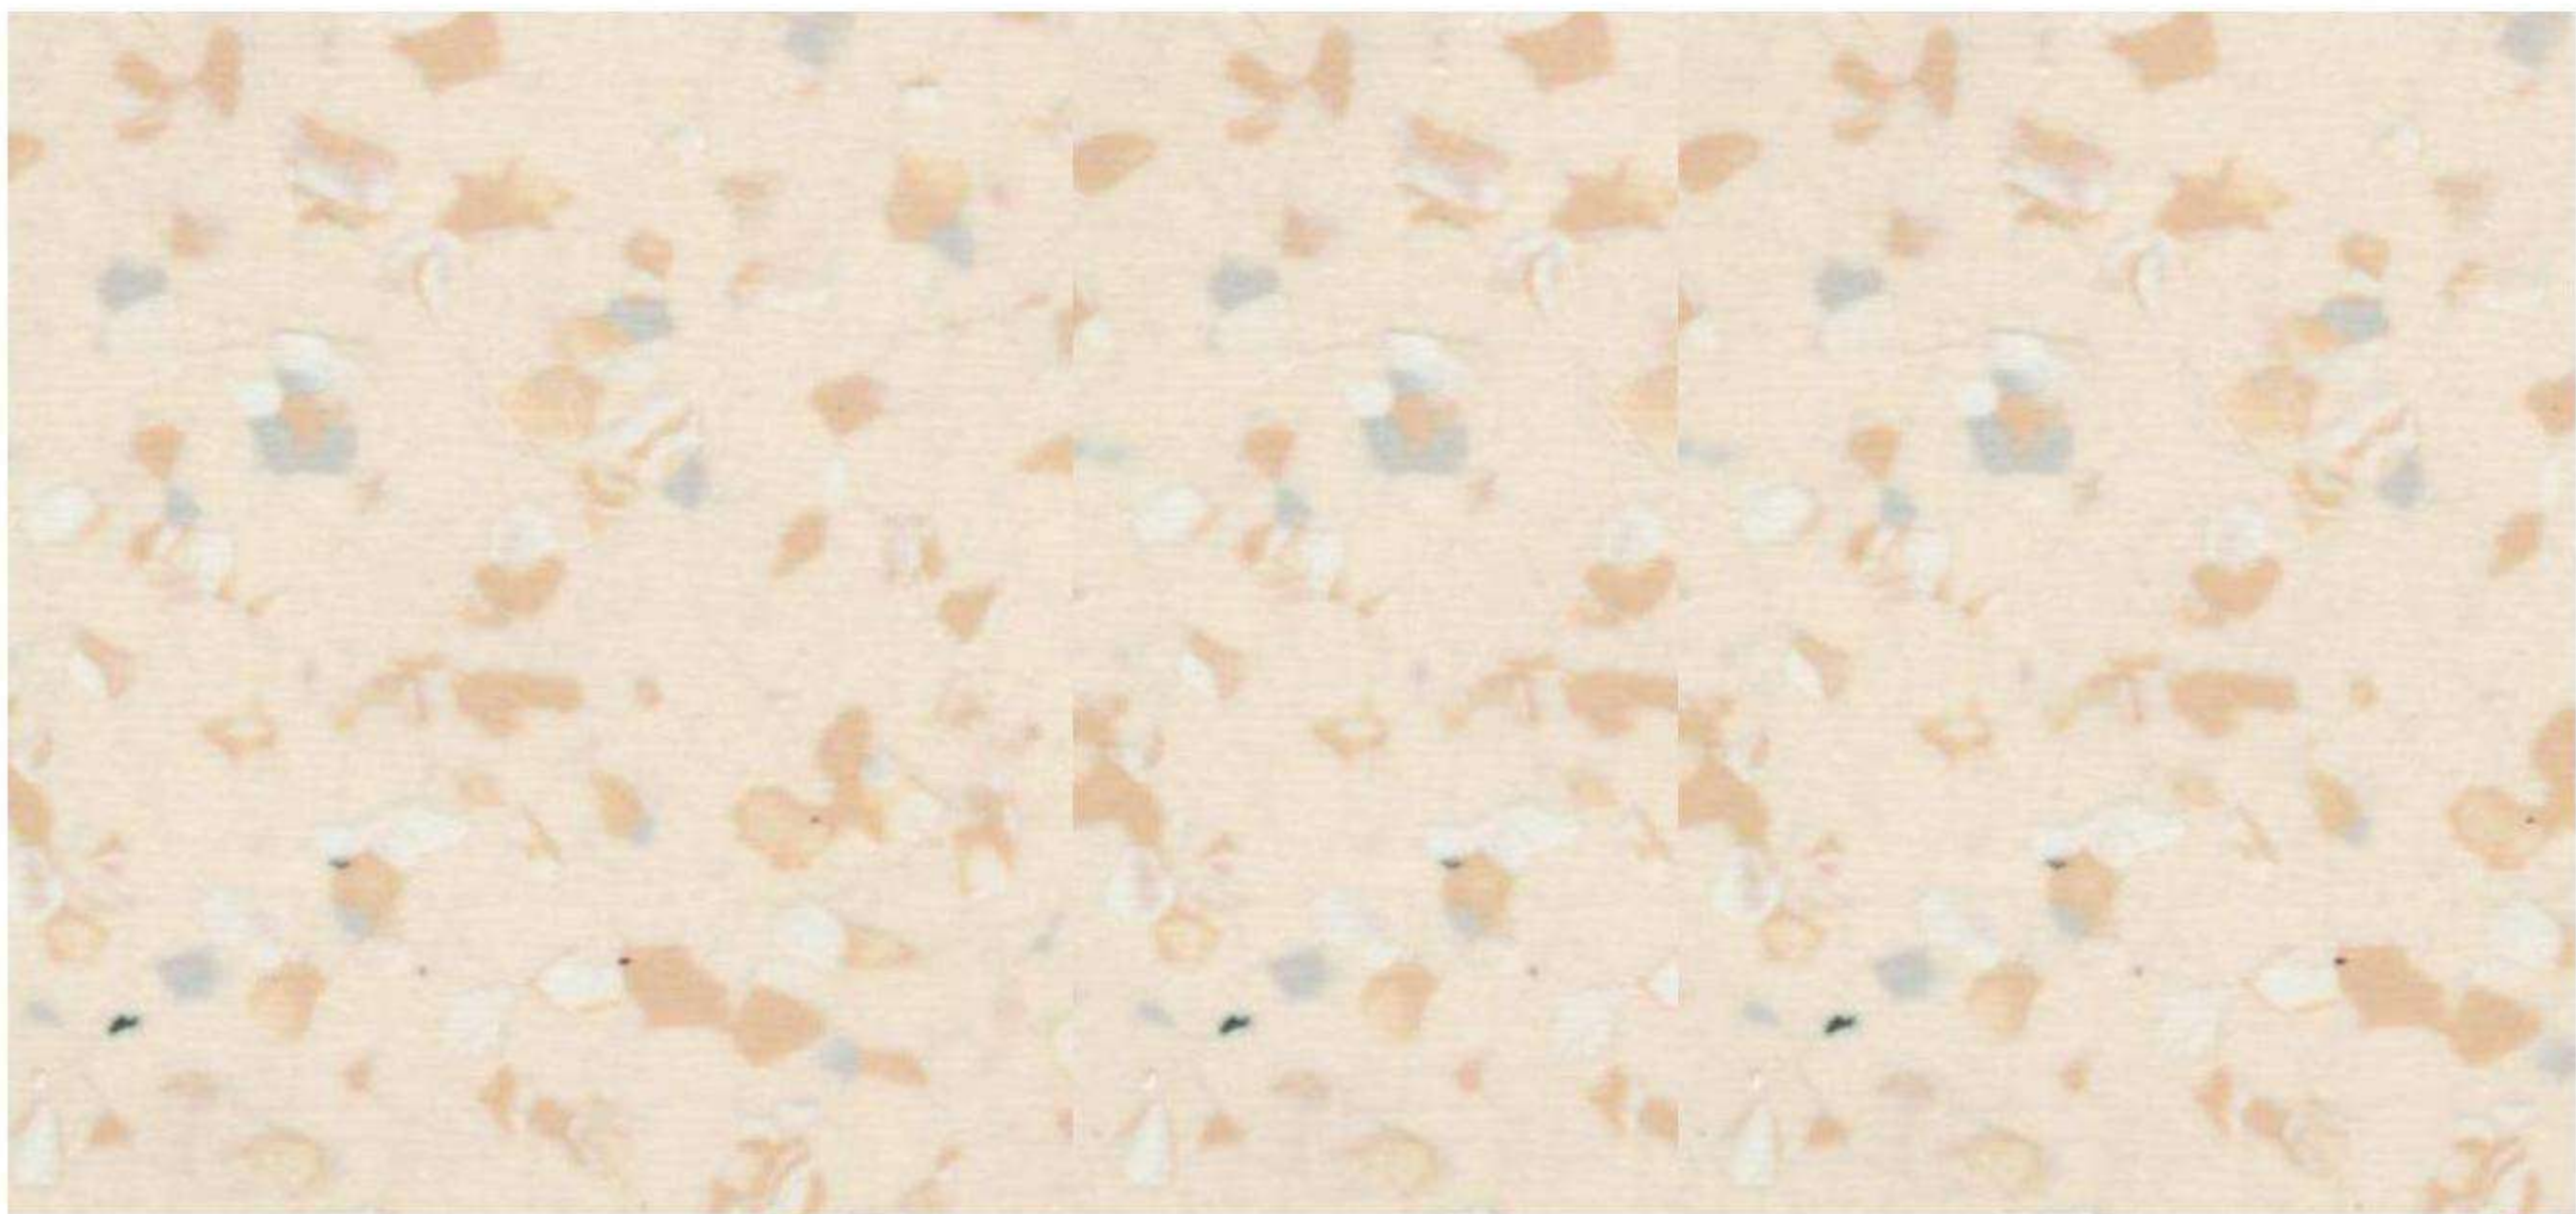


DS-7501

Sugar Cookie



DS-7502

Rosy Horizon

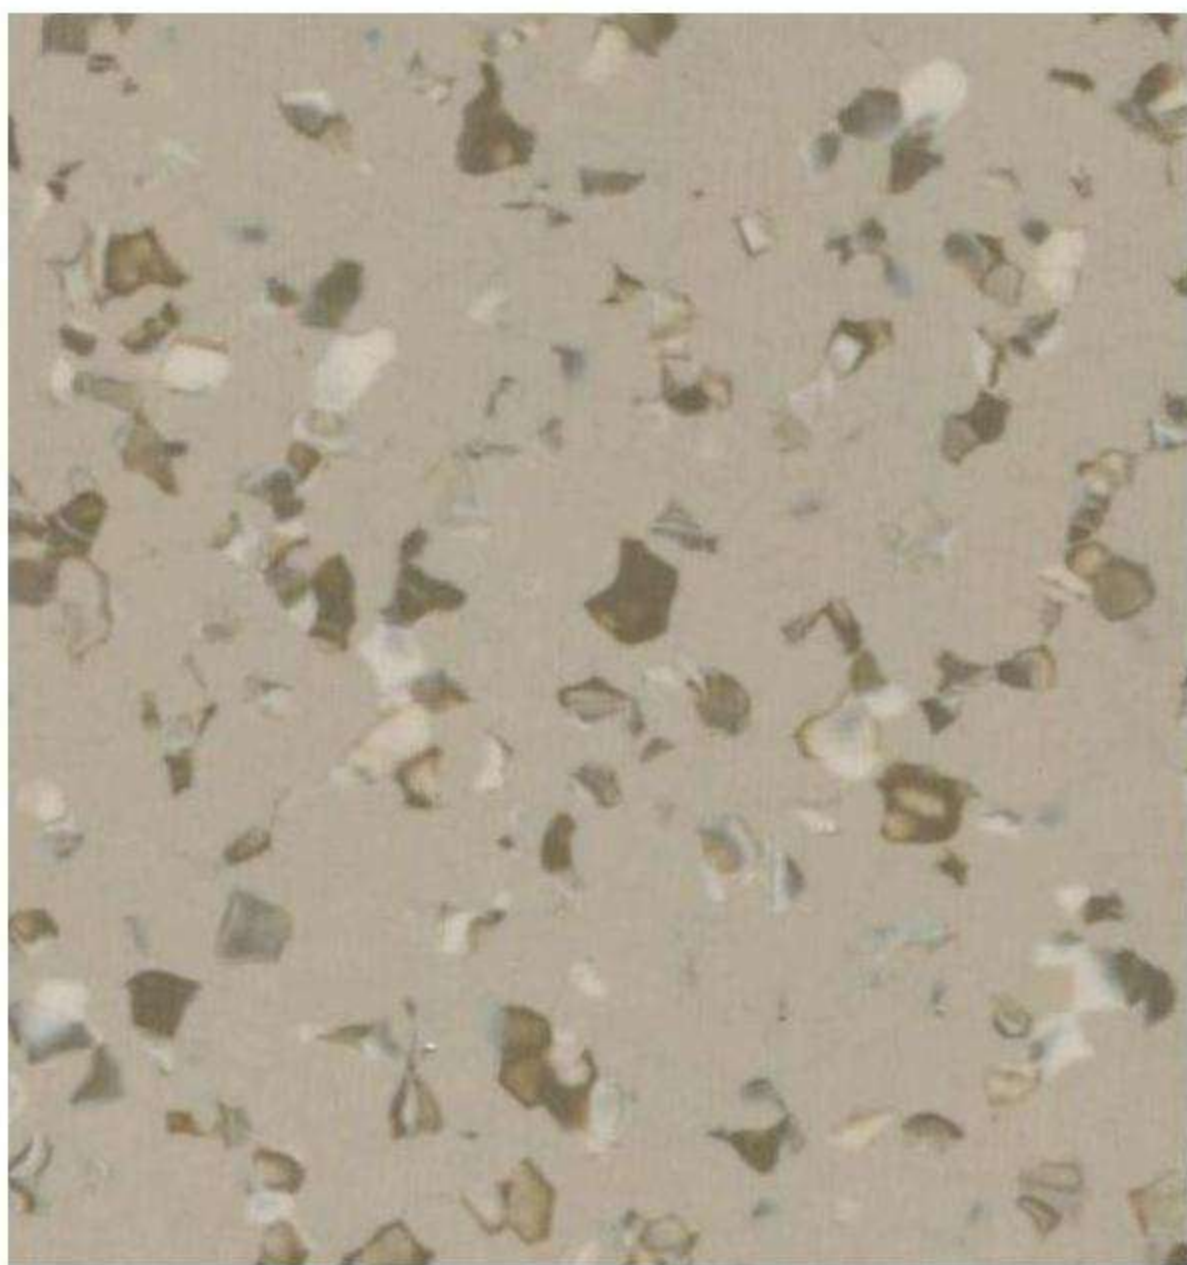


DS-7503

Ginger Root




DS-7504

Mistflower

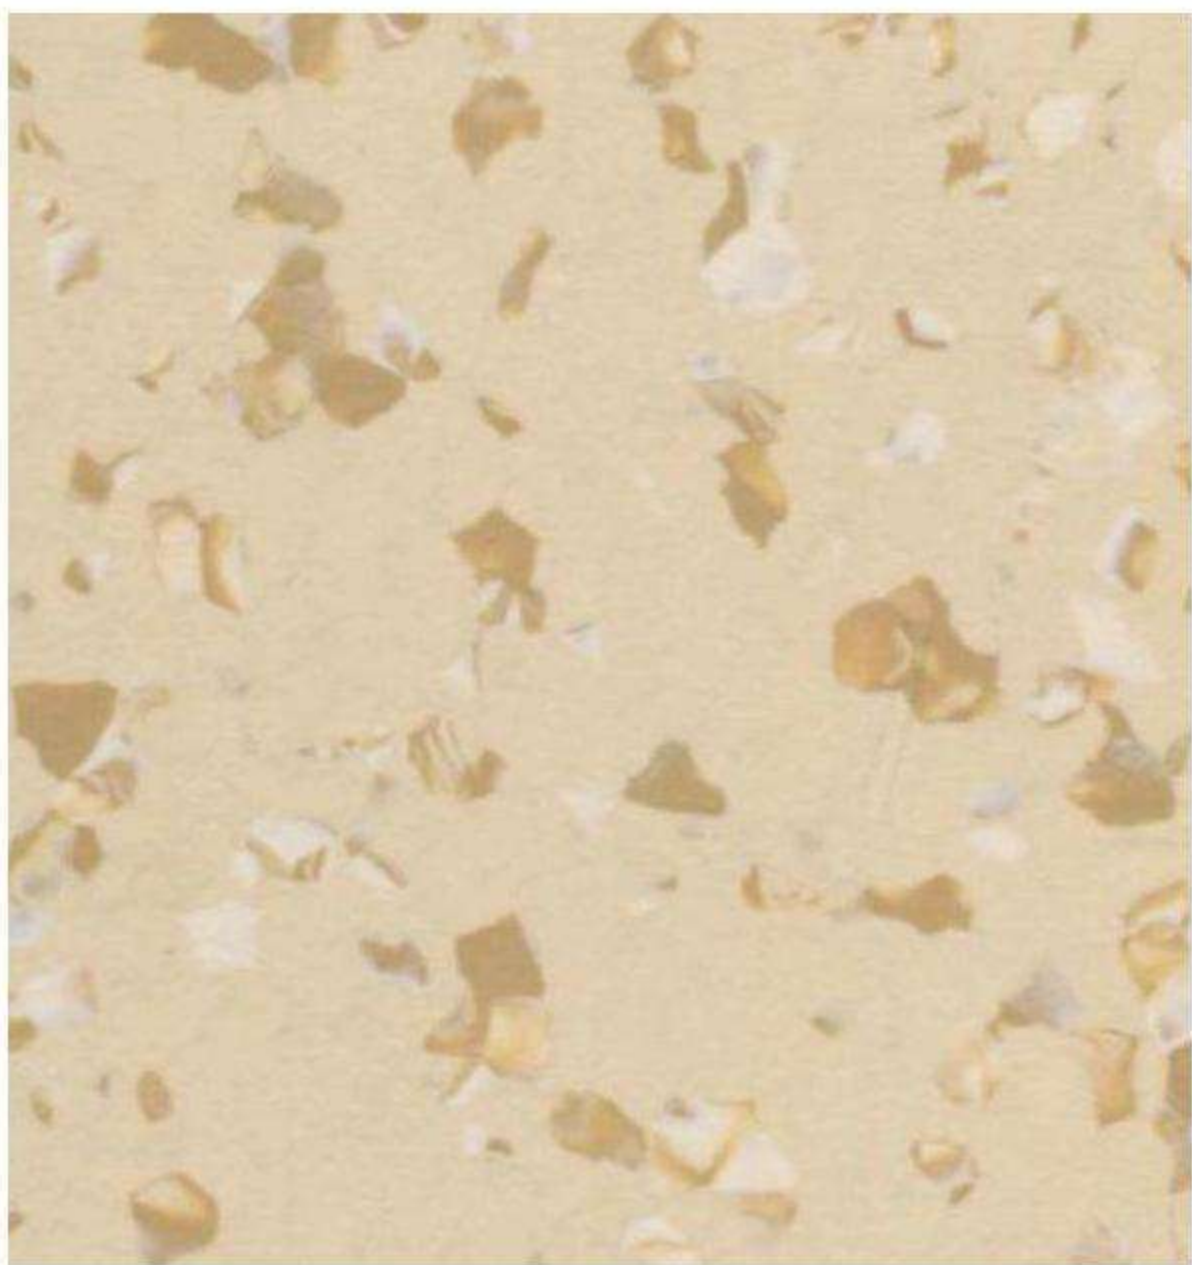


DS-7505

Ivory Sand

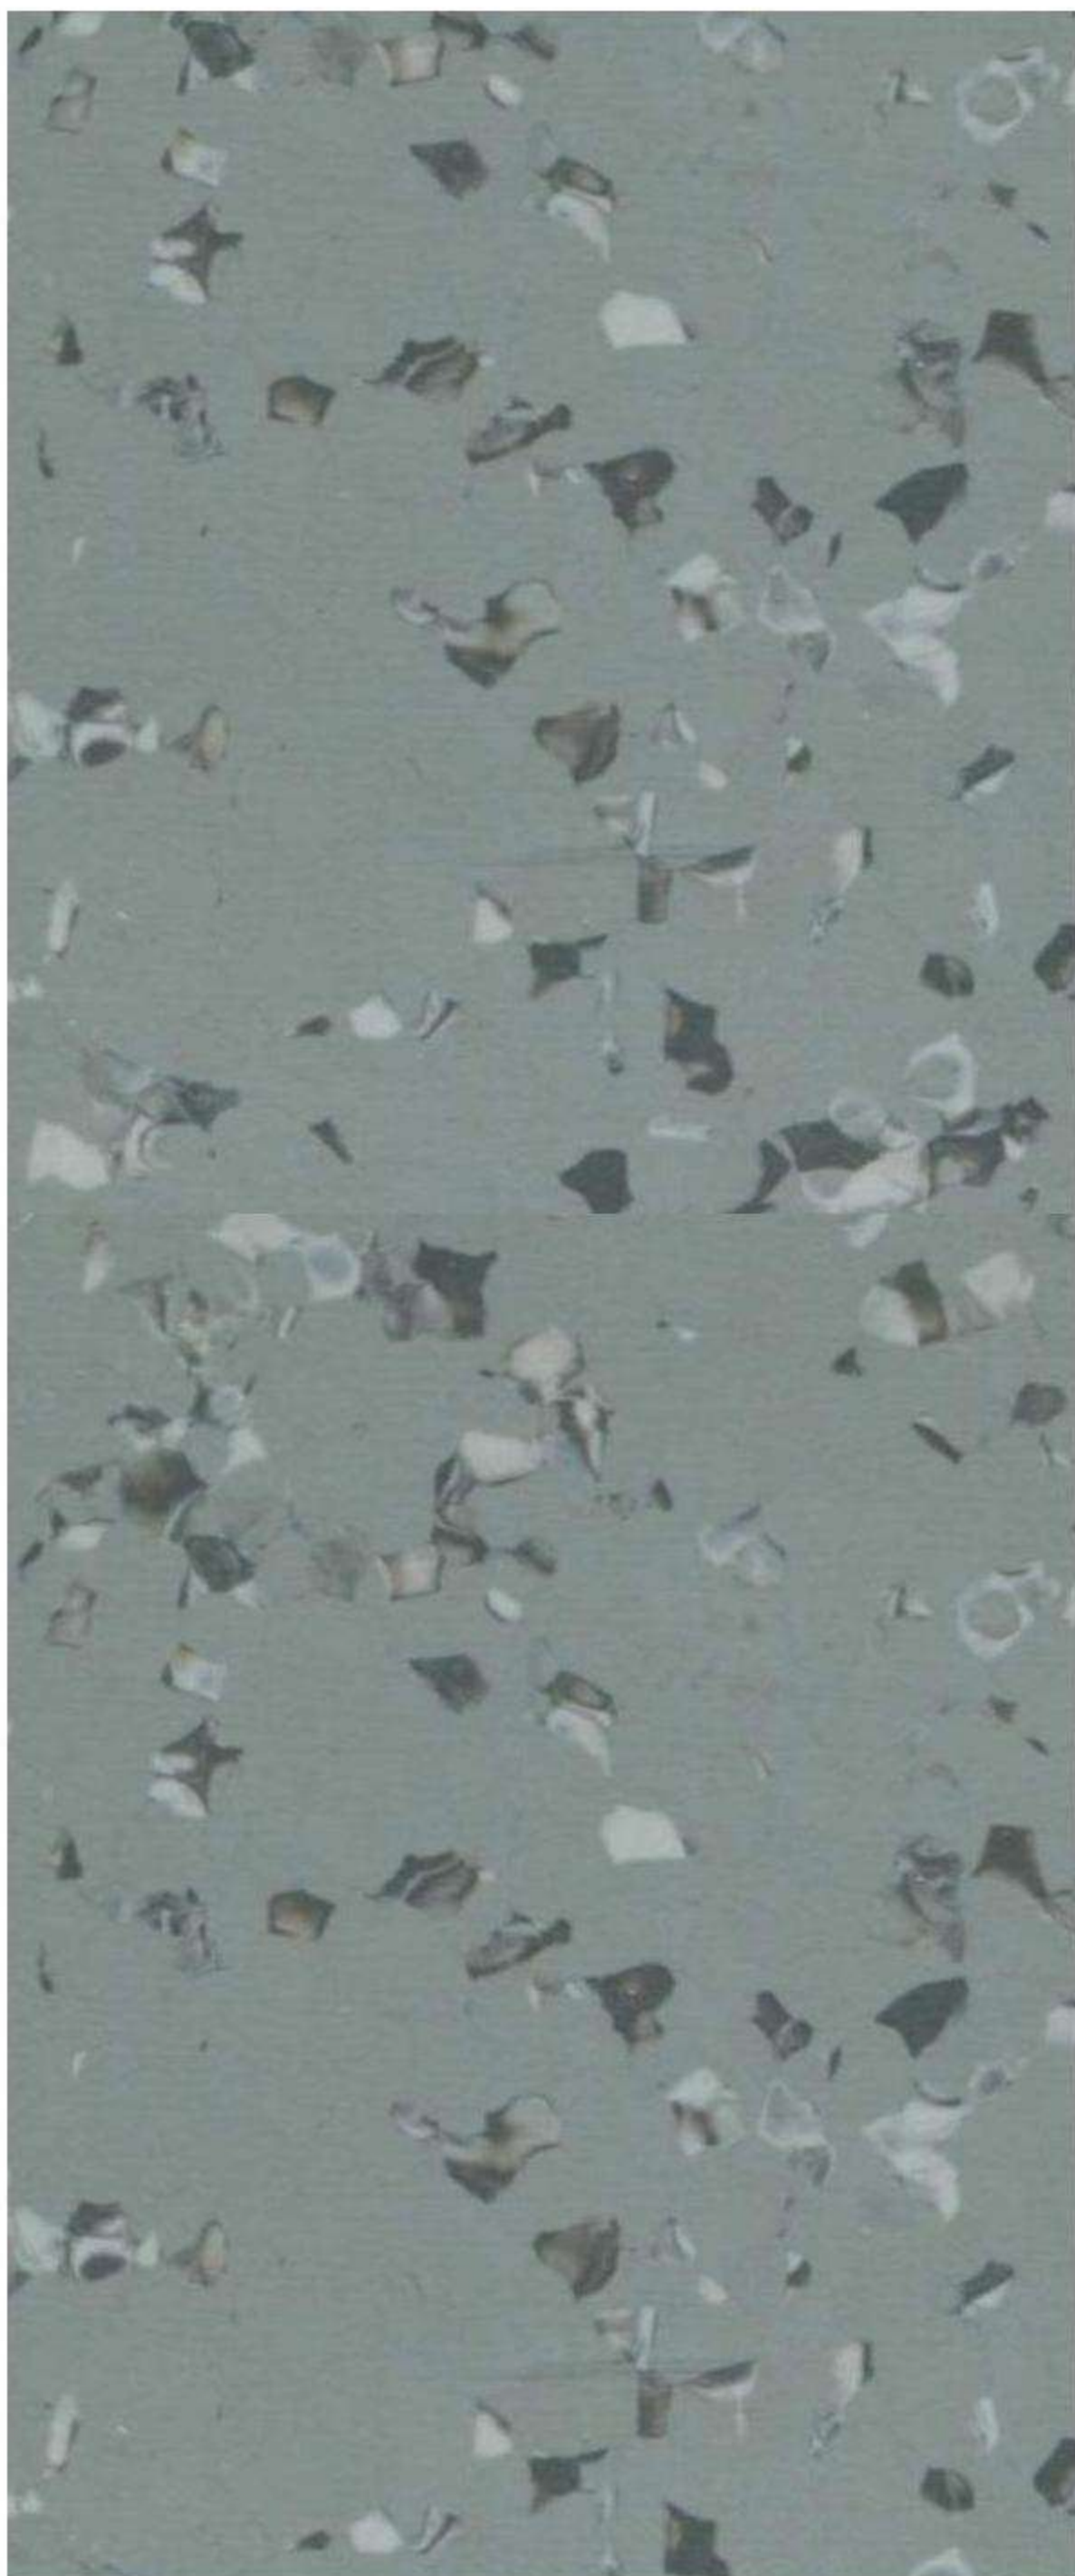

DS-7506

Spanish Gray

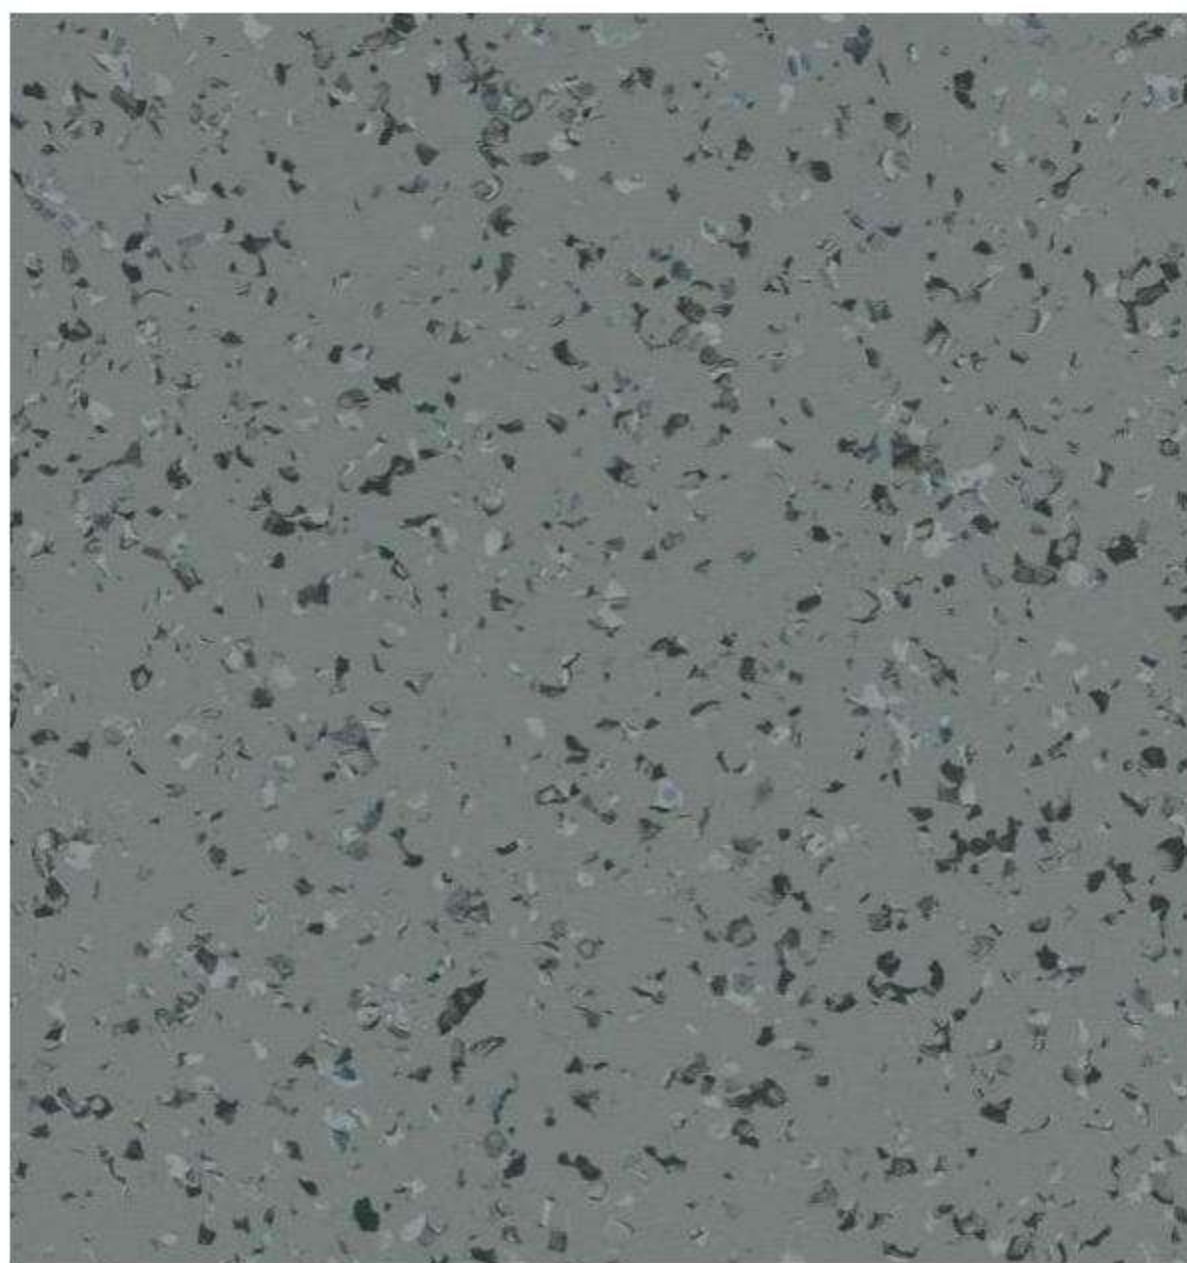


DS-7507

Spring Water




DS-7508

Outer Space

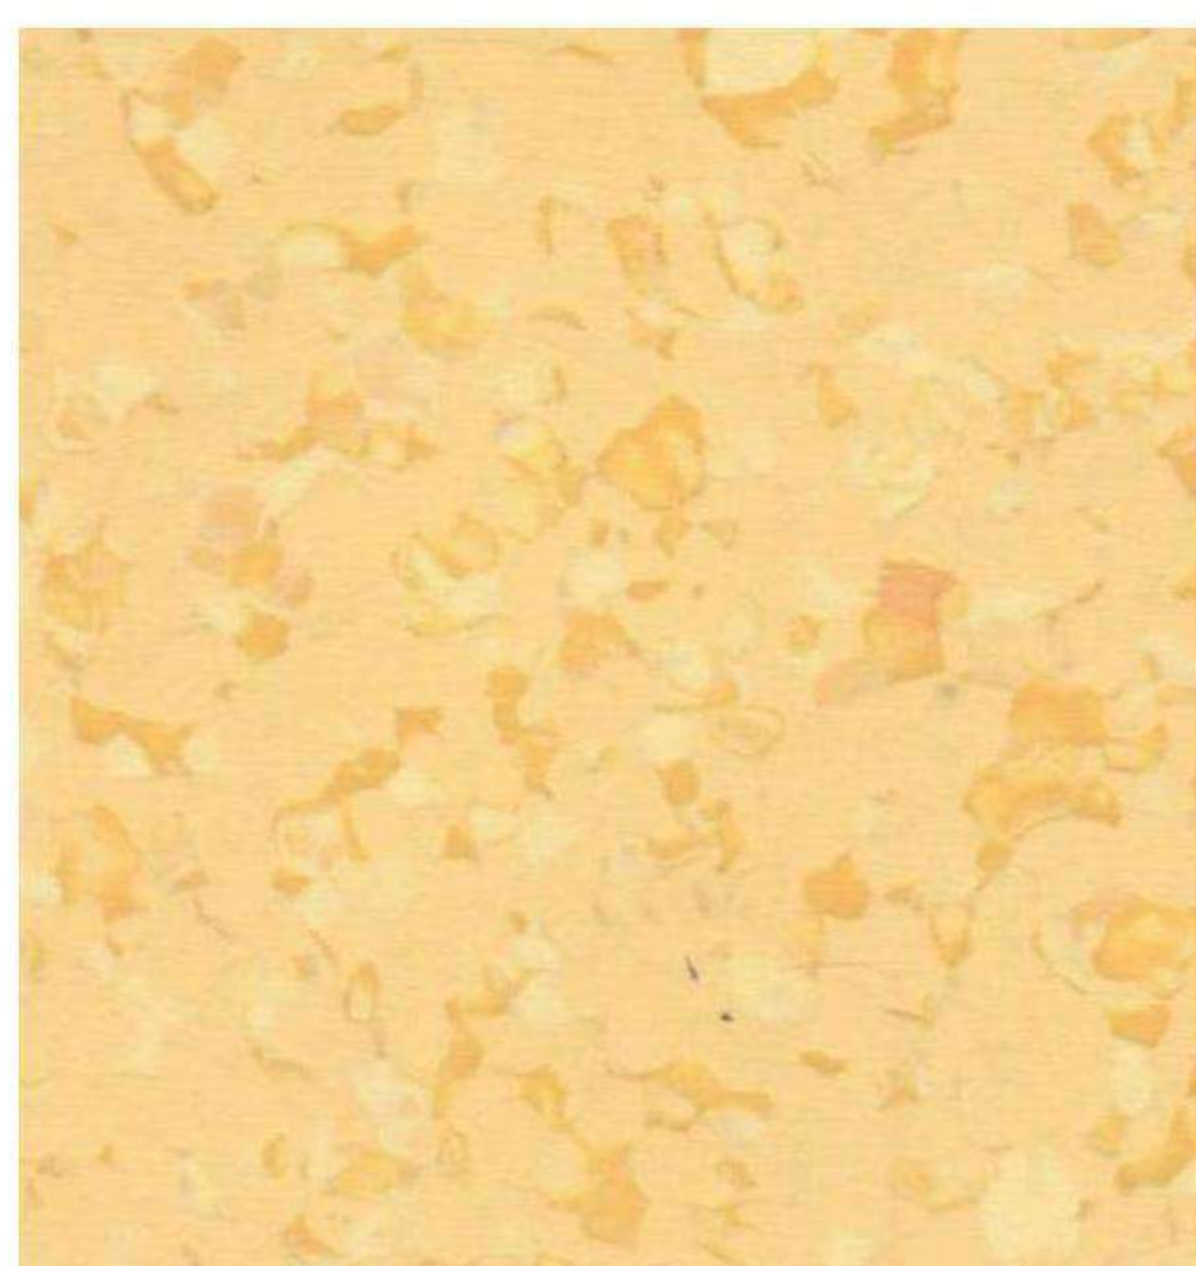


DS-7509 Lemon Meringue

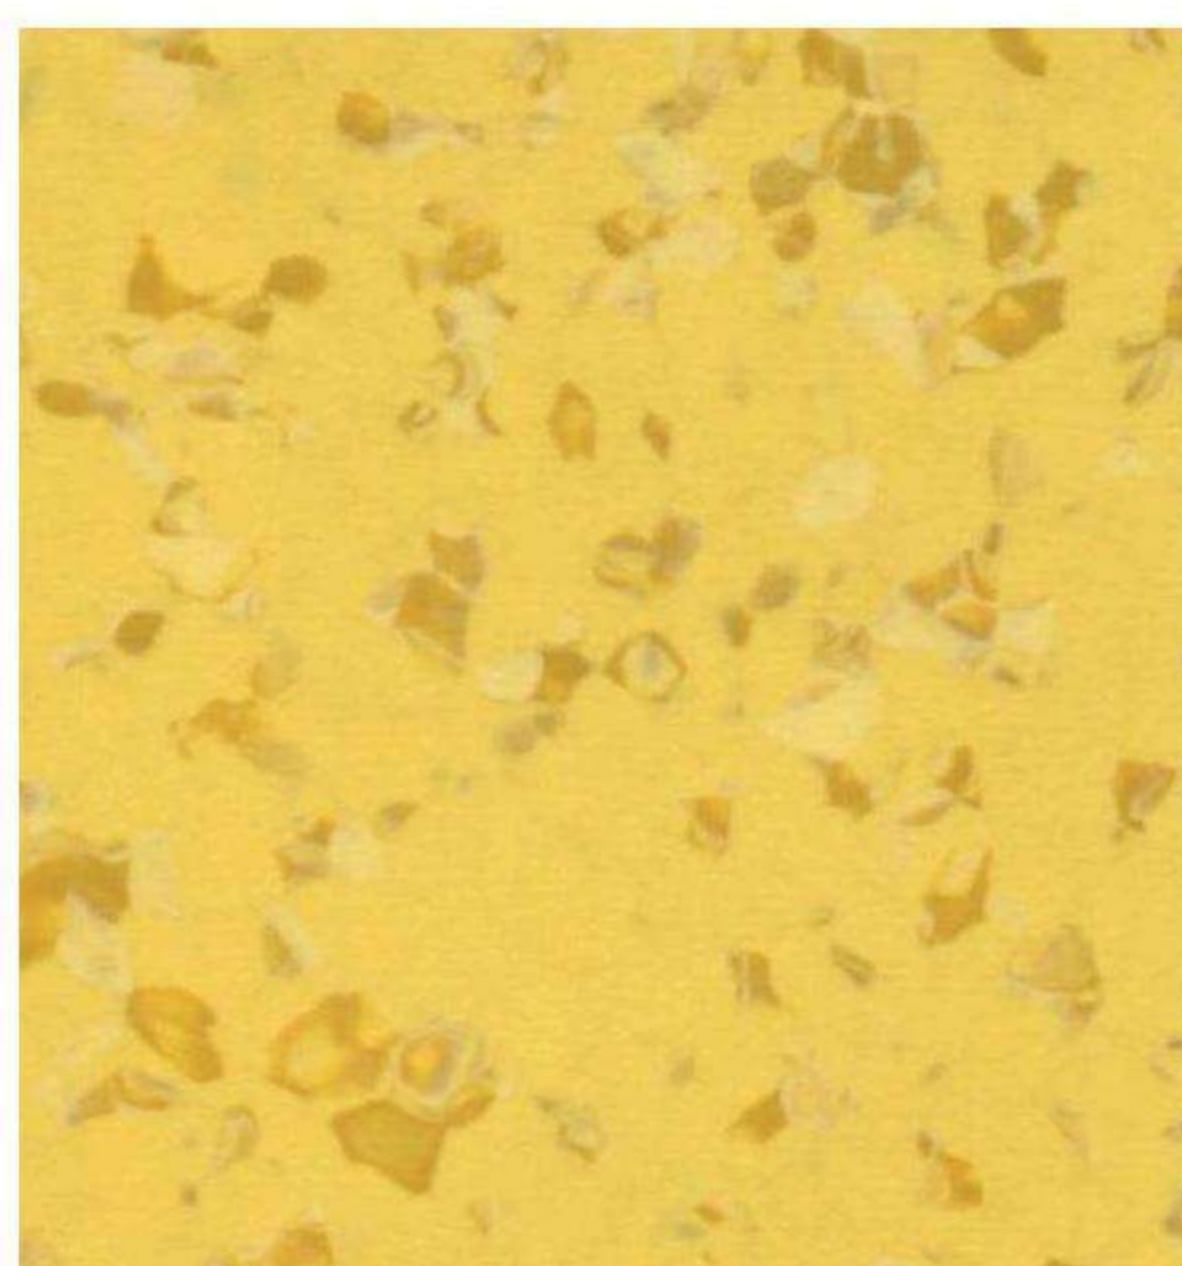


DS-7510 Lemon Yellow




DS-7511 Tuscan Sun

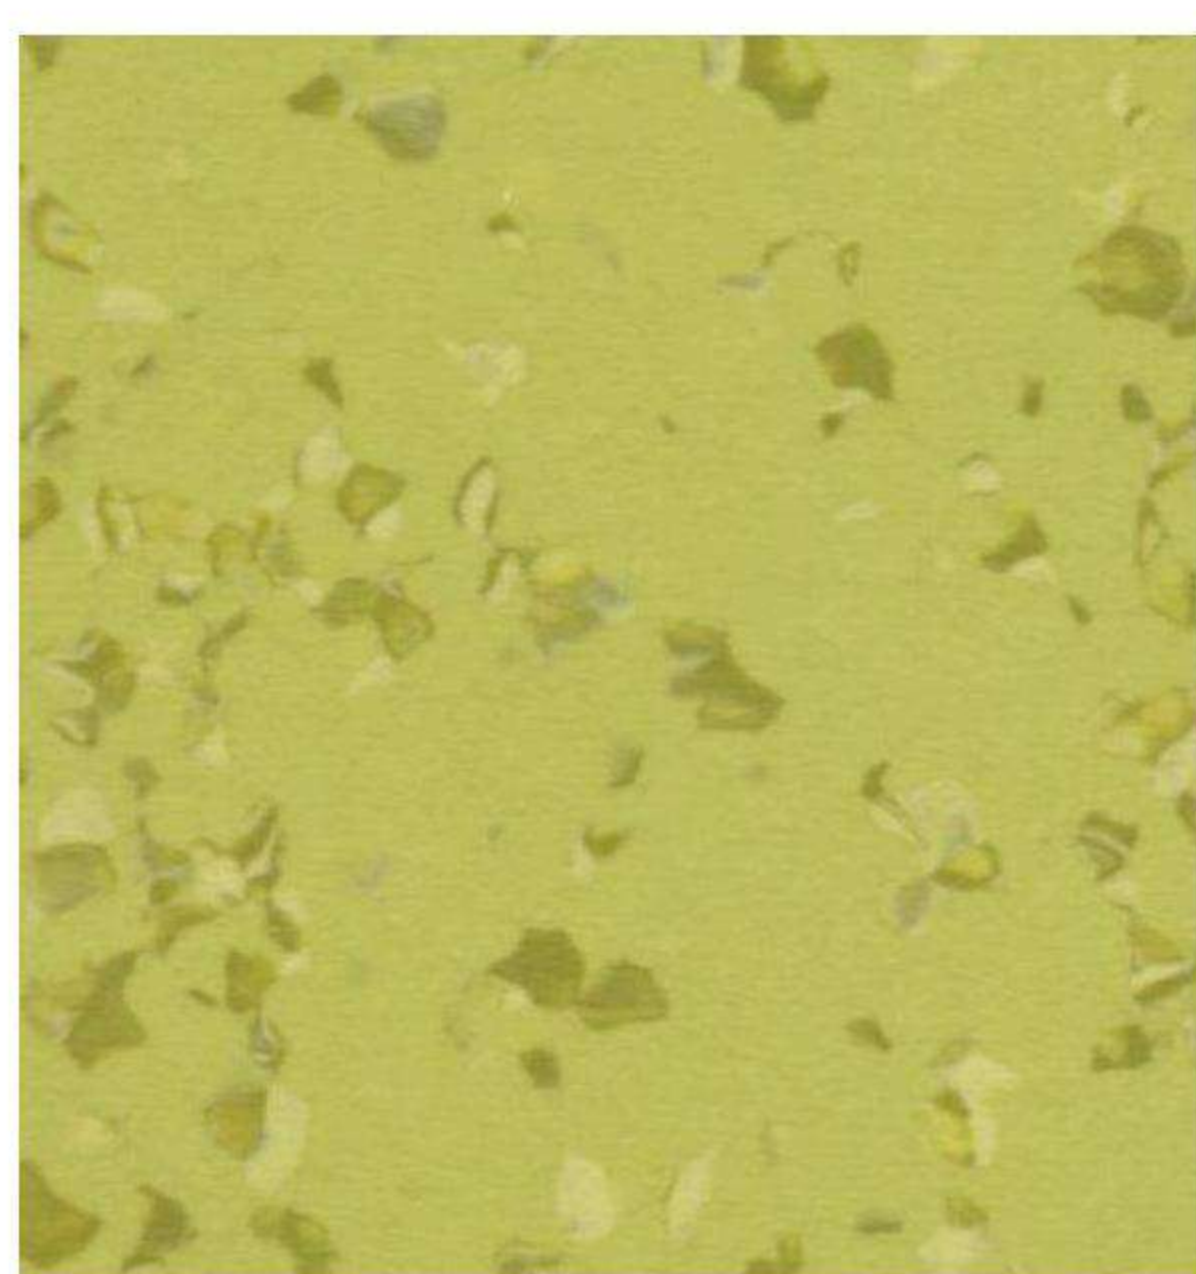


DS-7512 Spring Bud Green

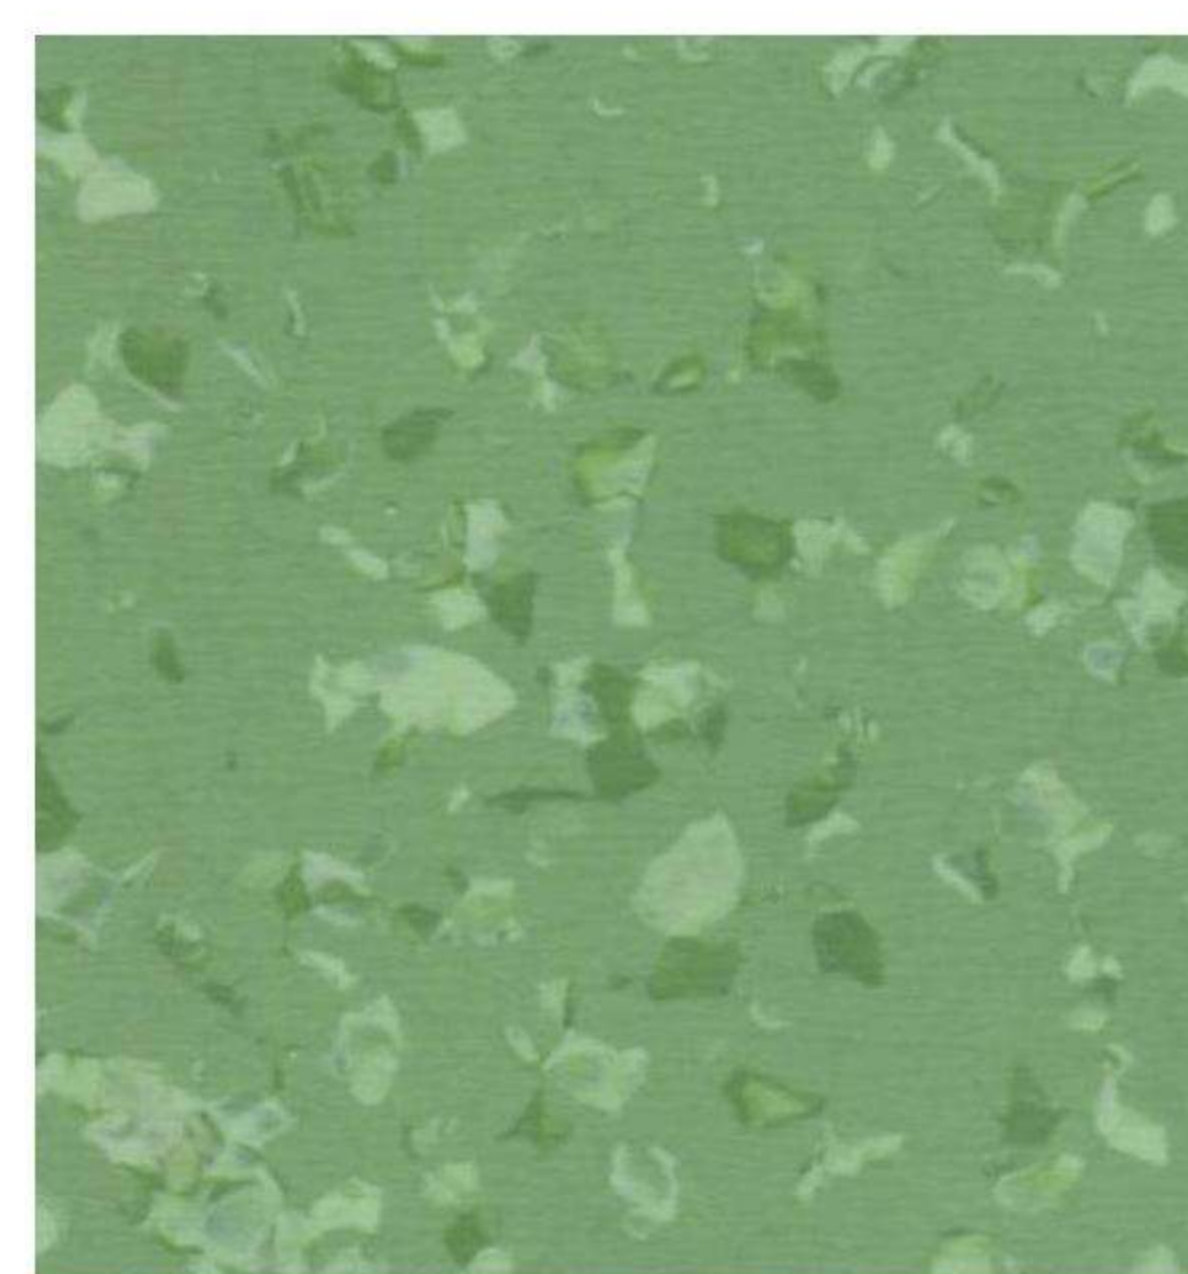


DS-7513 Mustard Green

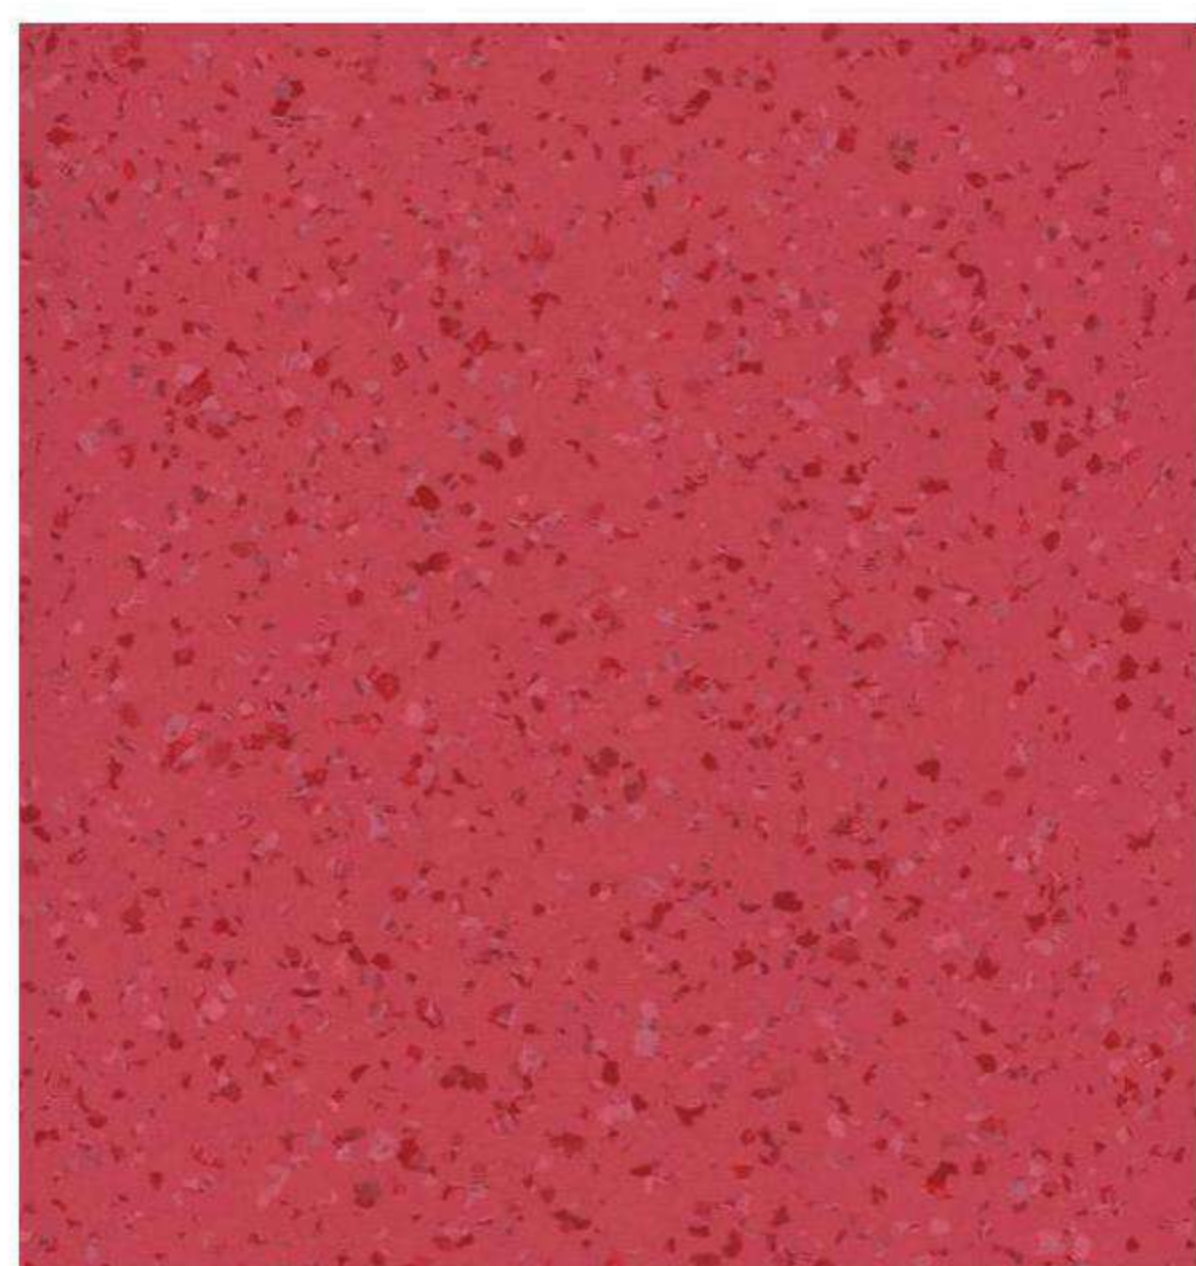


DS-7514 Crimson Red

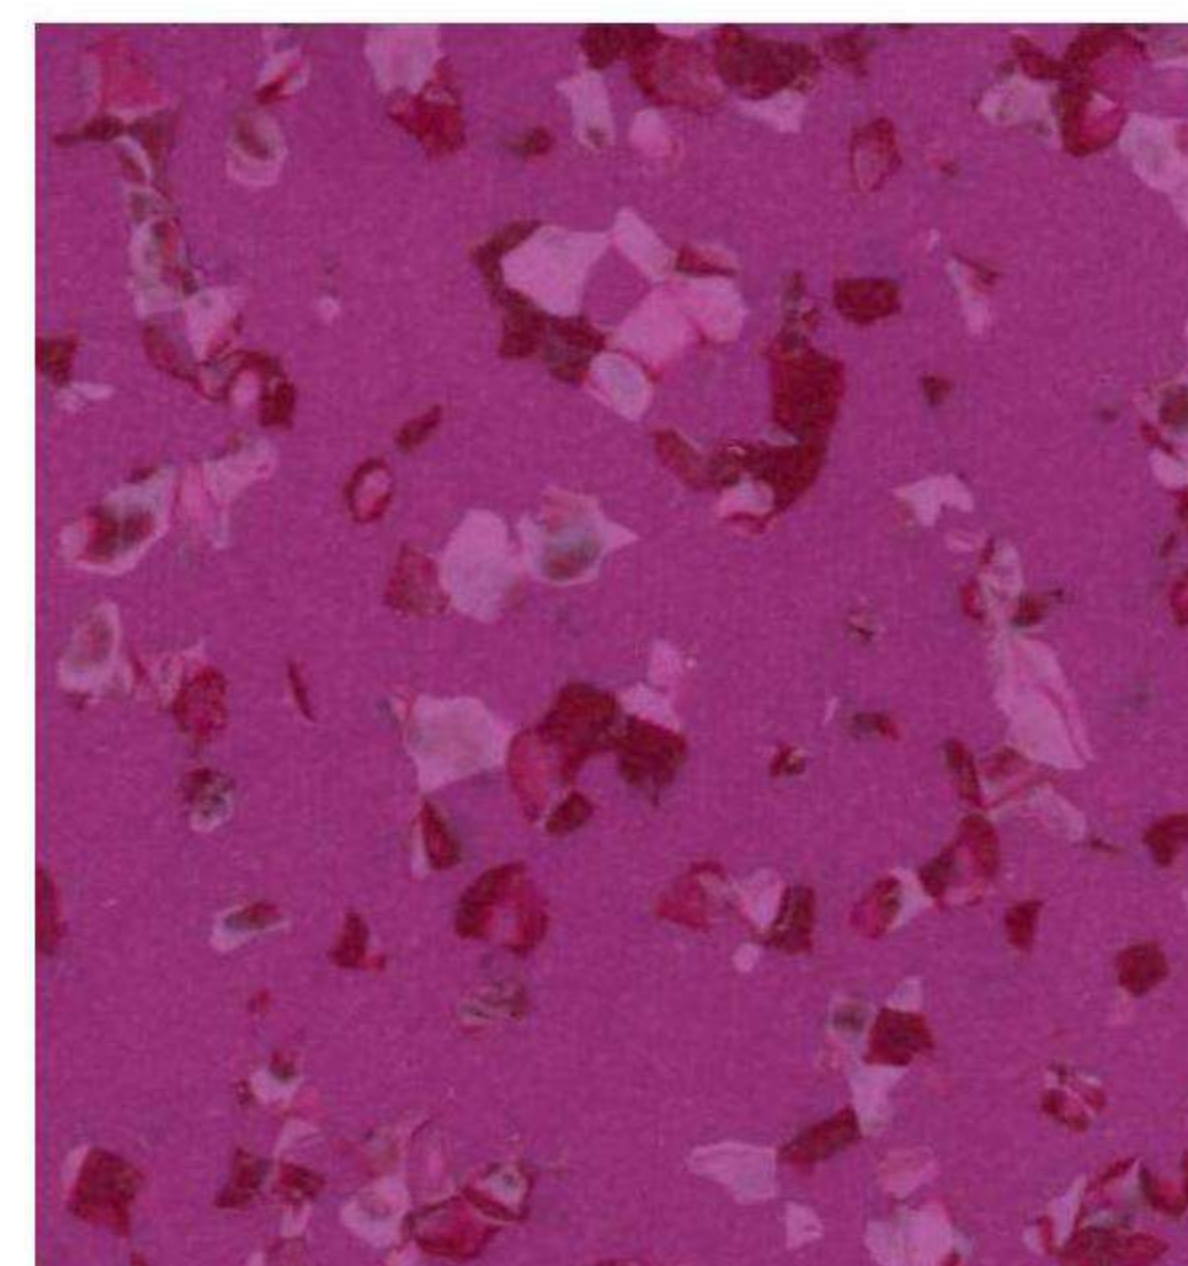

DS-7515 Deep Magenta

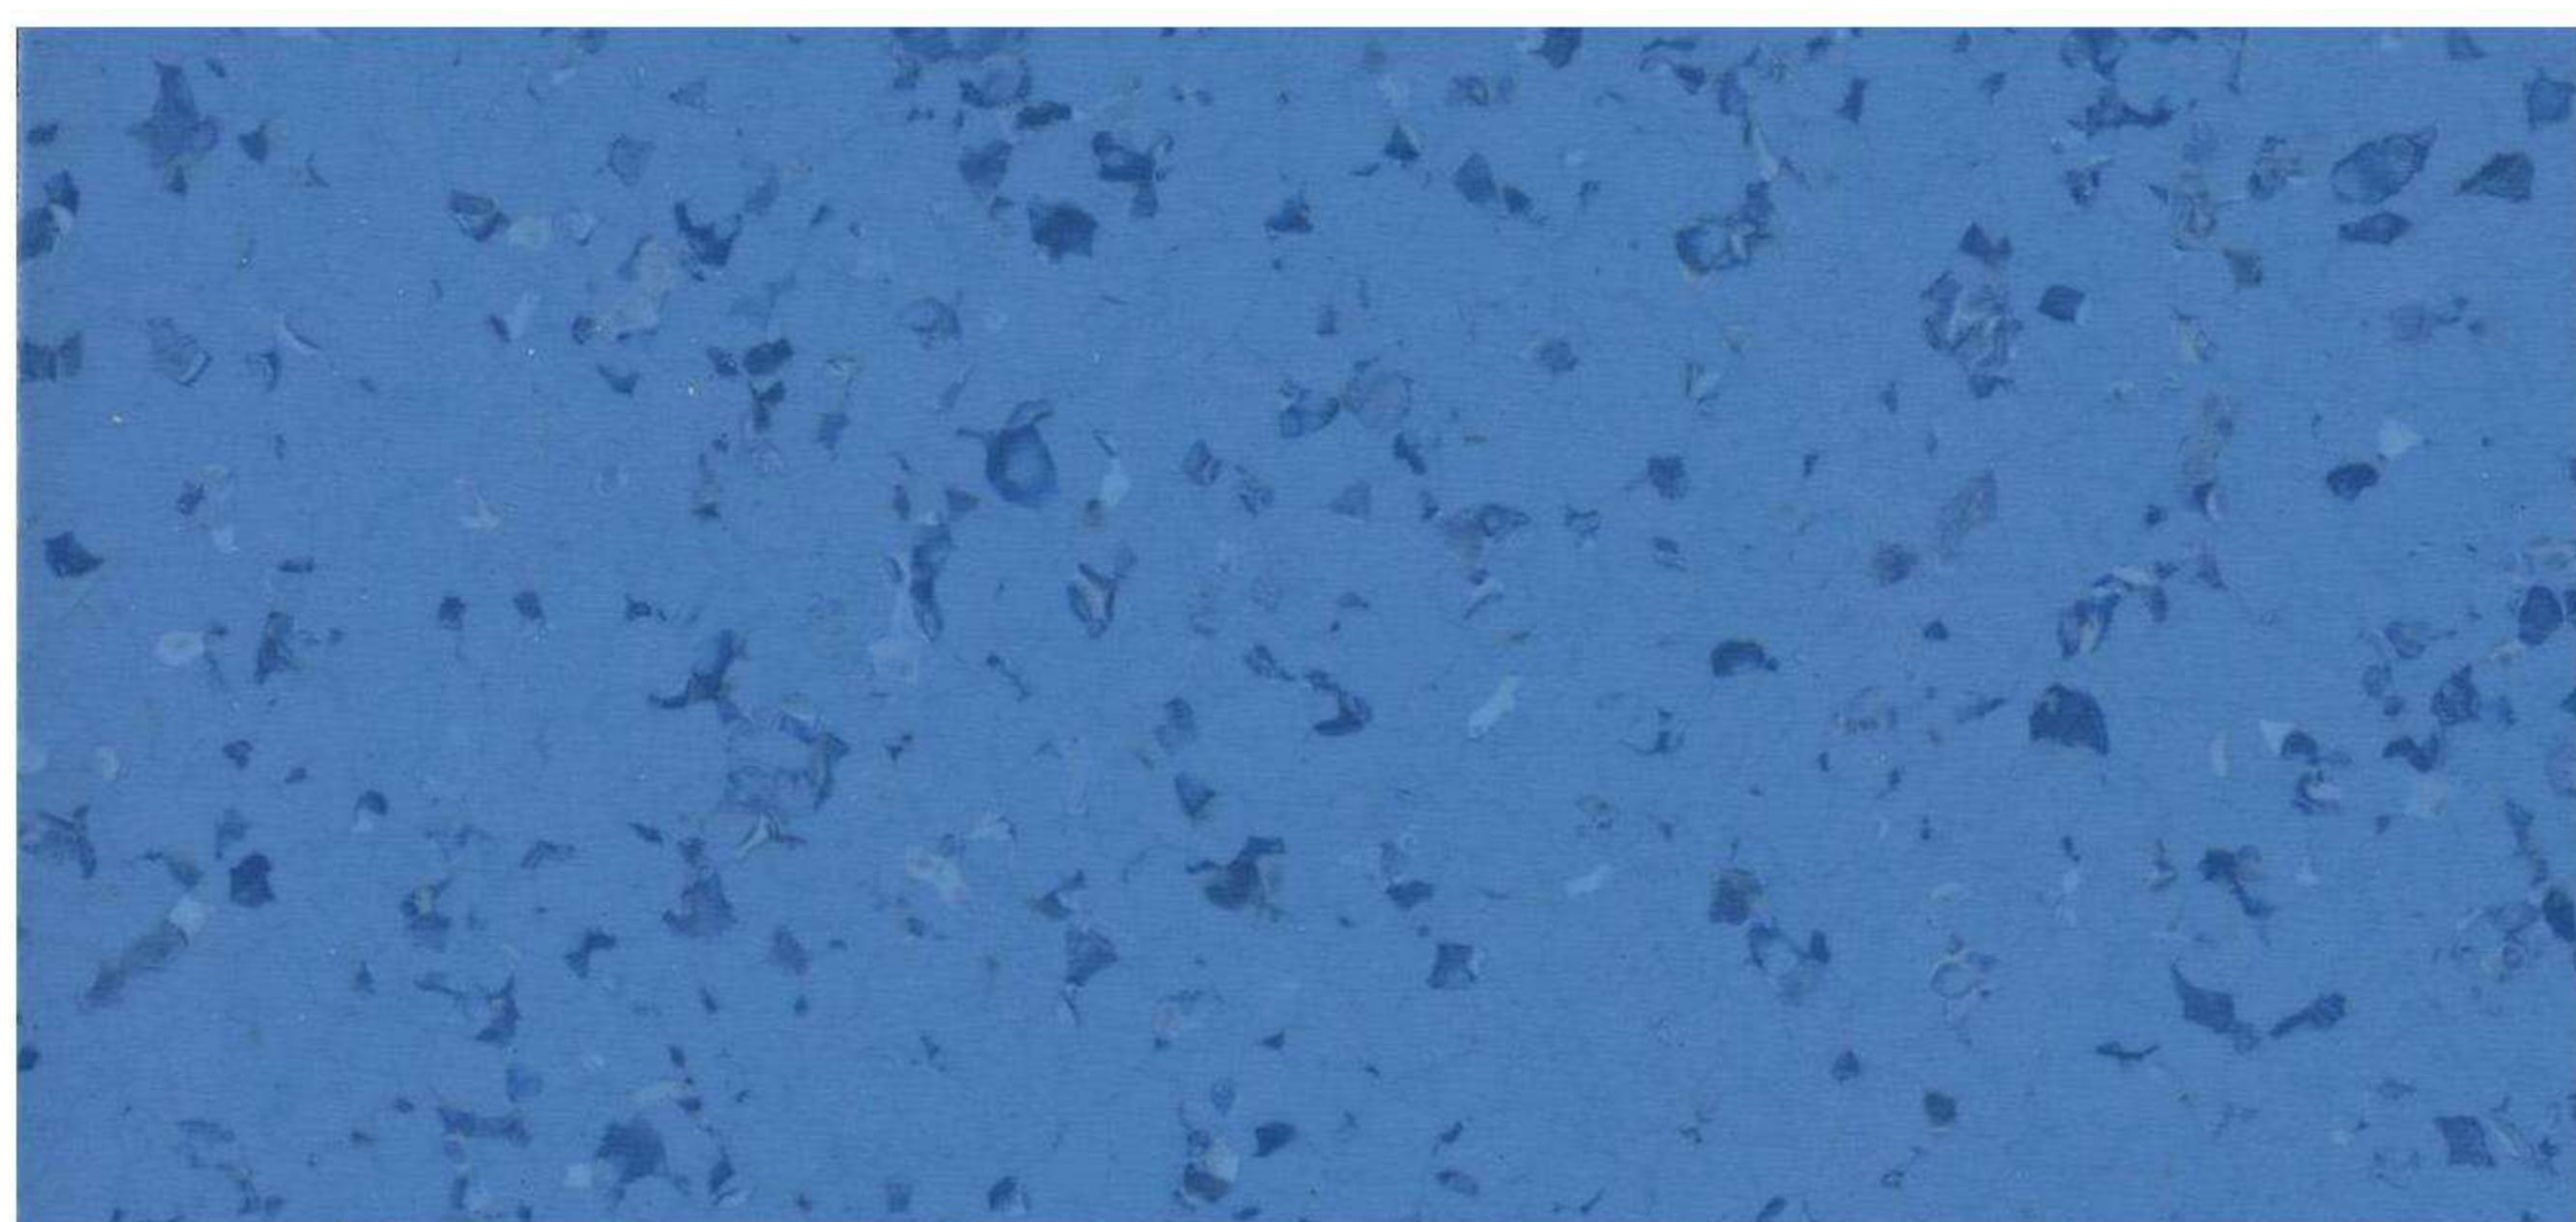

DS-7516 Hippie Blue

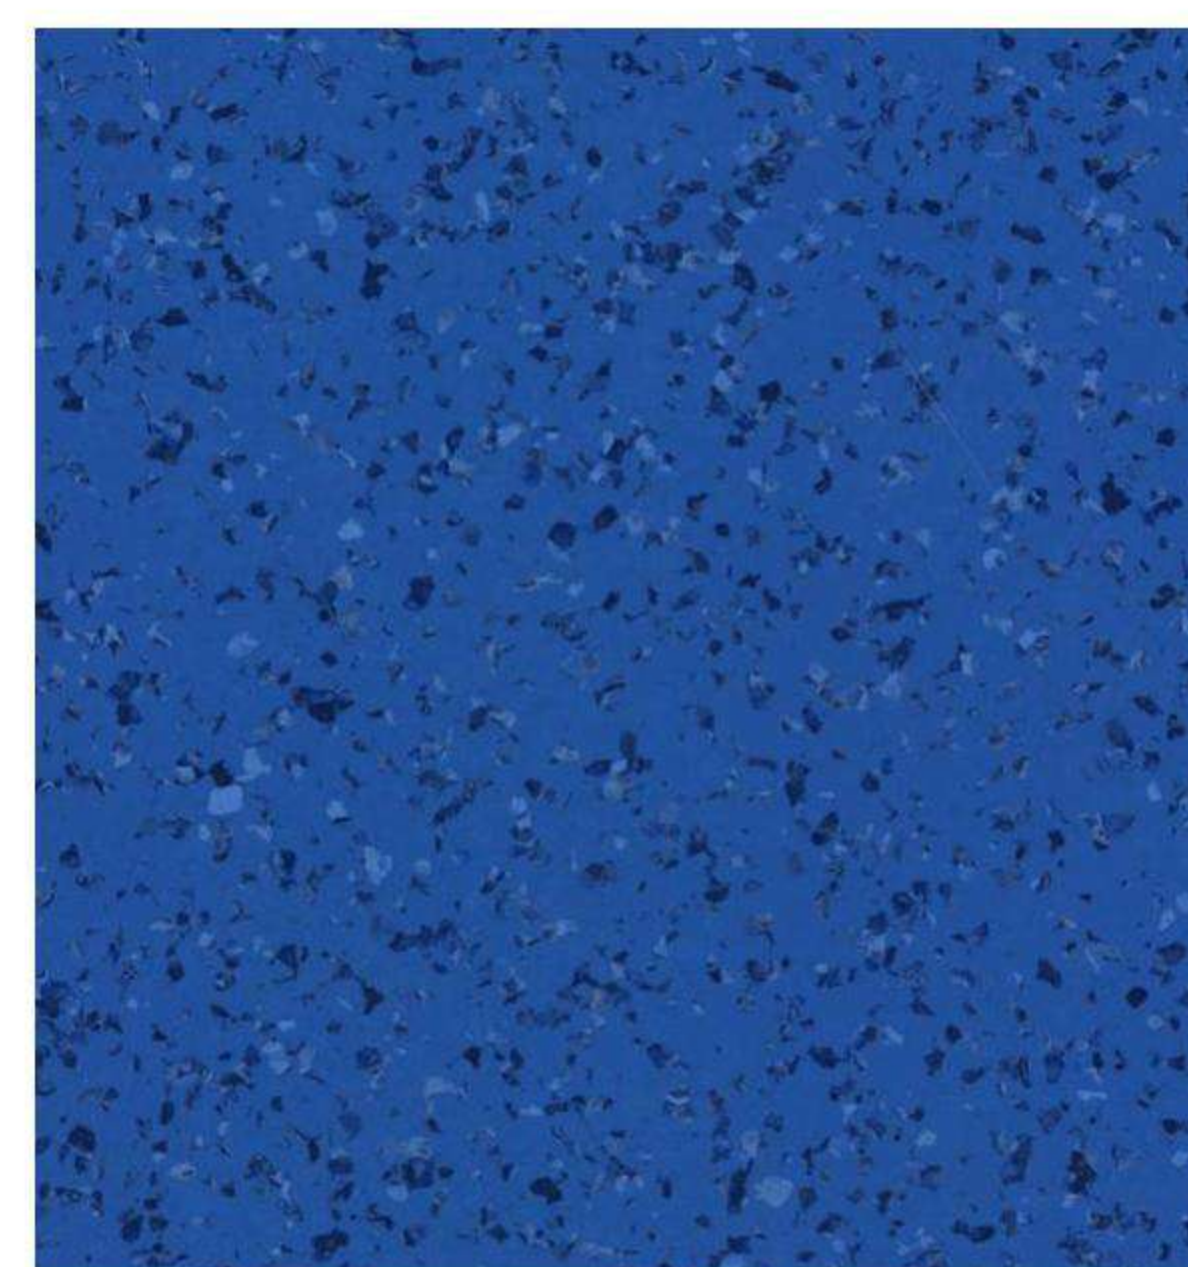


DS-7517 Teal Blue

DECOLUX™ SERENO



HOMOGENEOUS VINYL
Size: 2.0mm x 2m x 20m

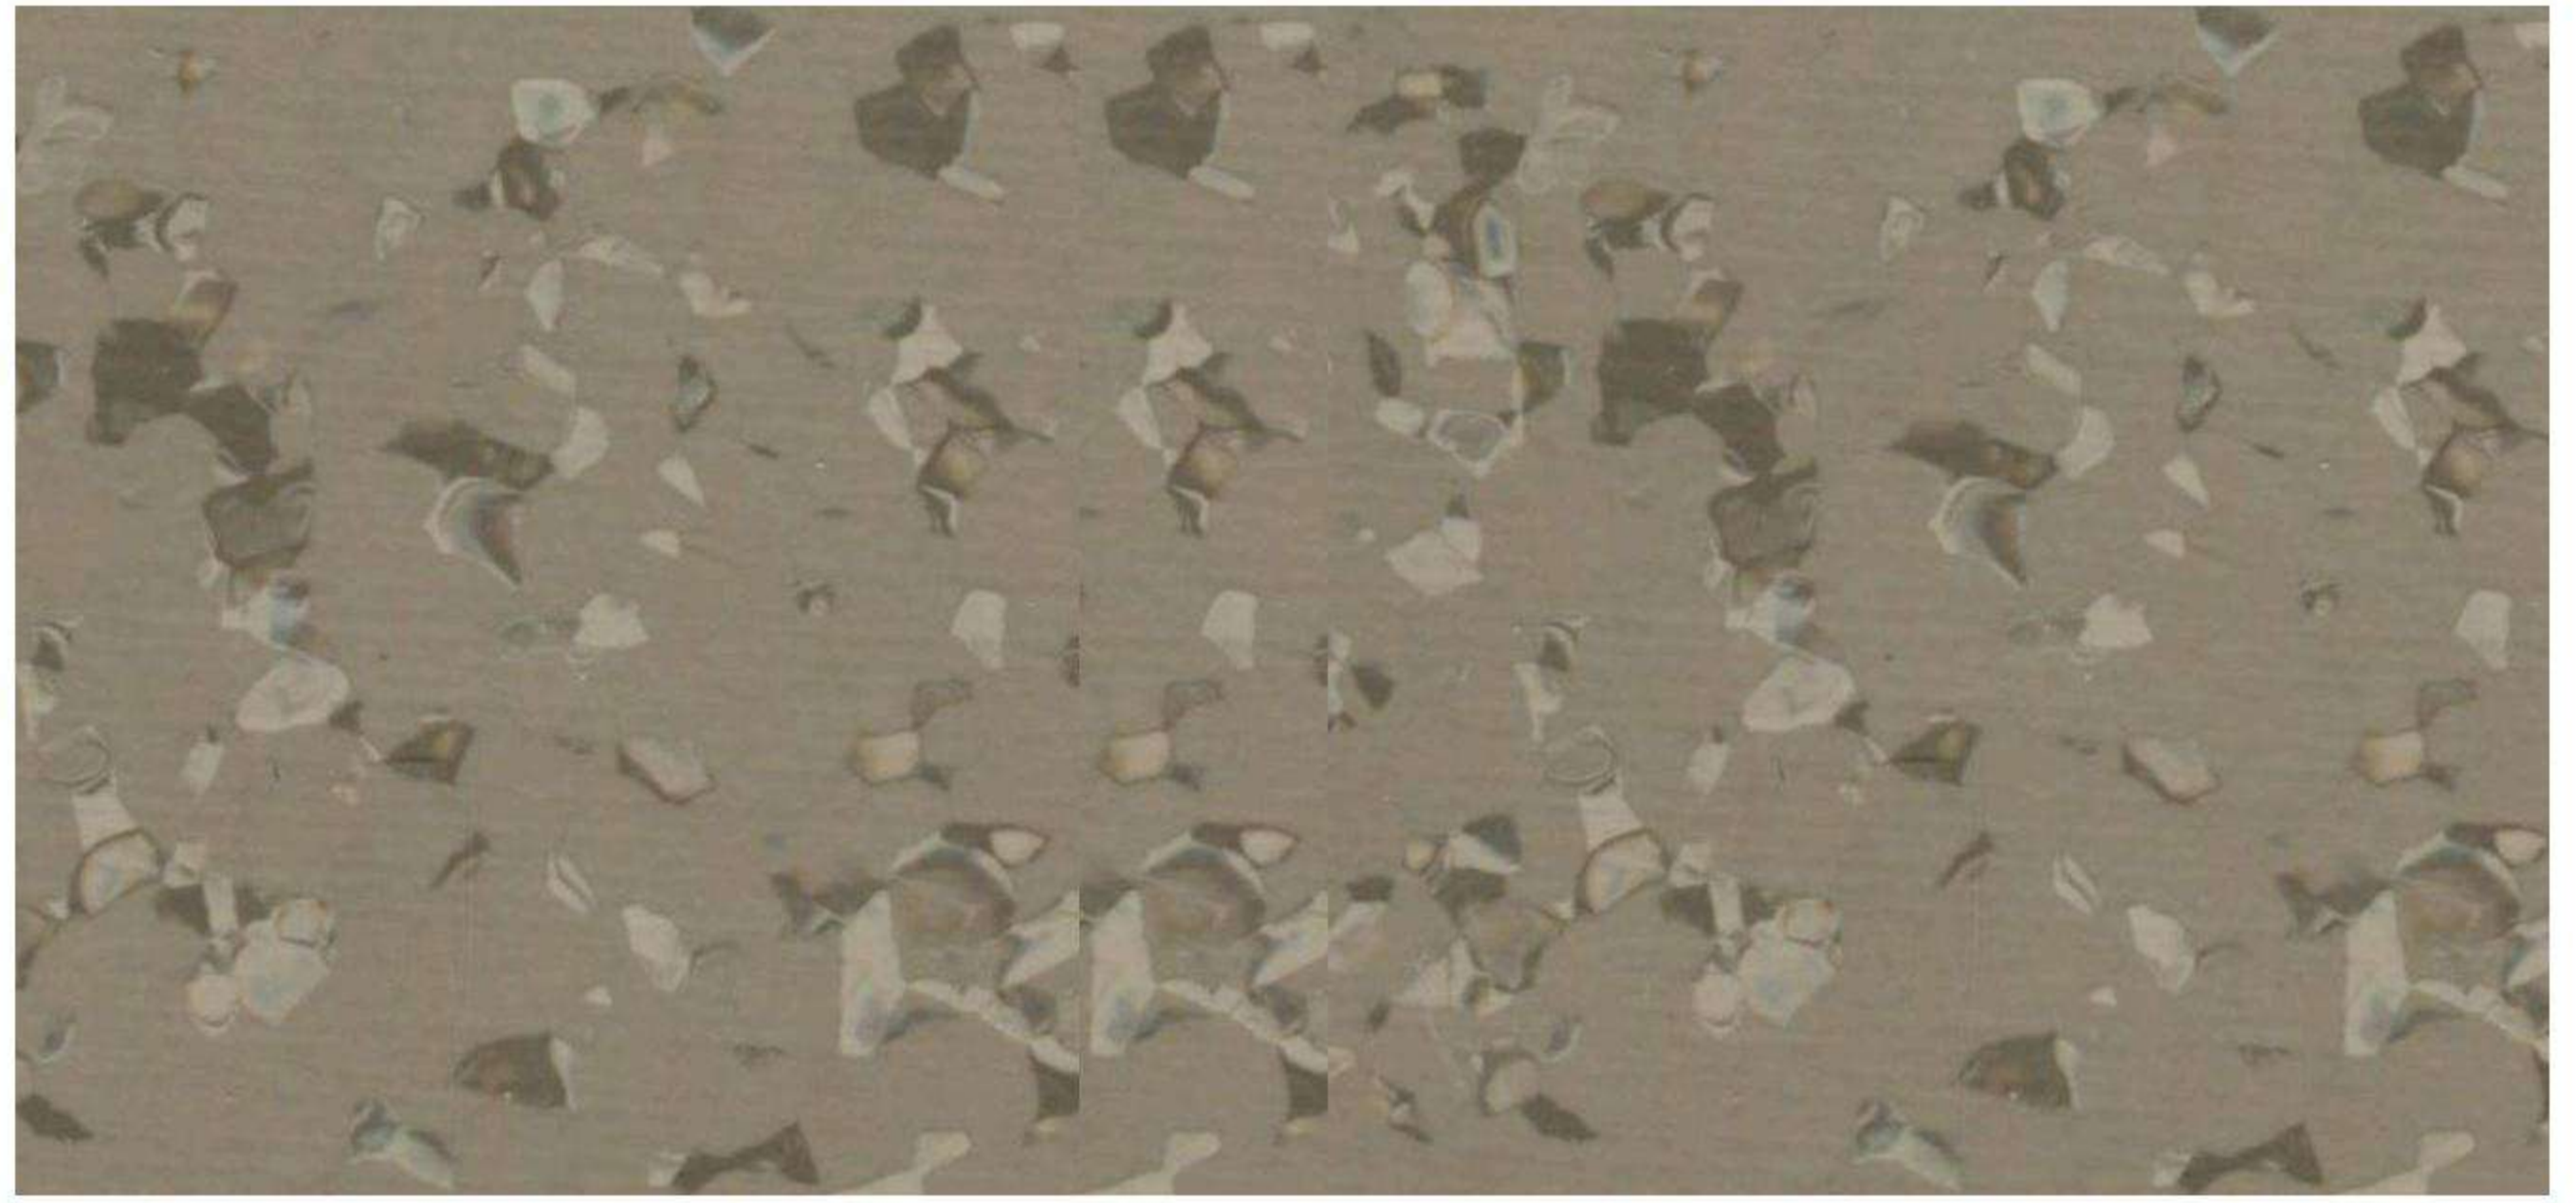


DS-7518

Teton Timber




DS-7519

Alabaster

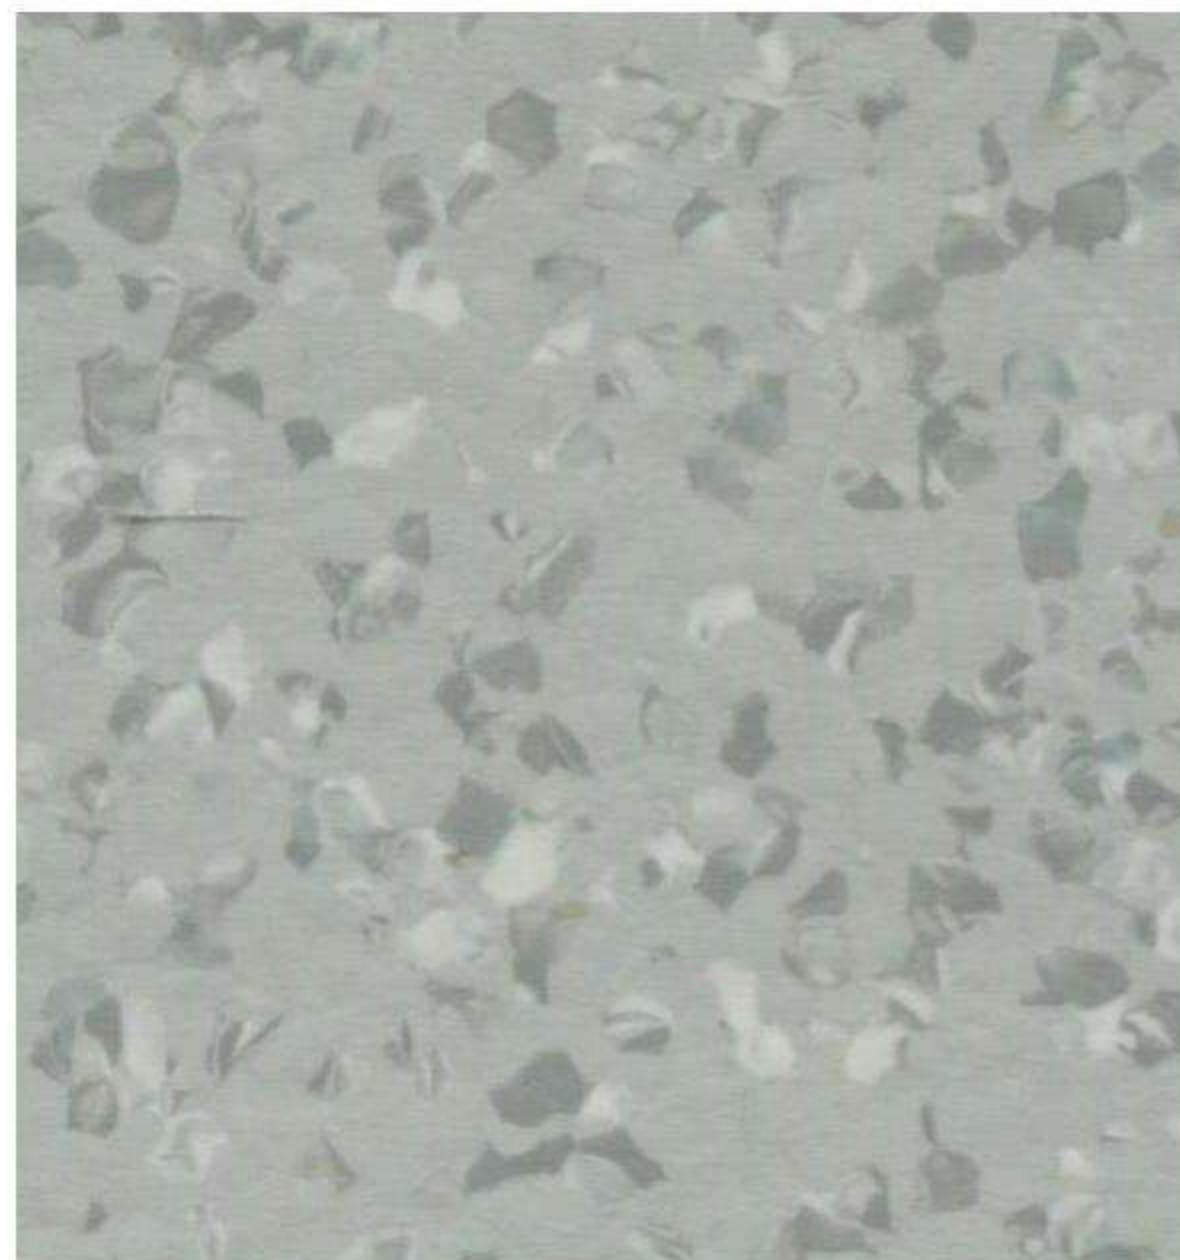


DS-7520

Gainsboro

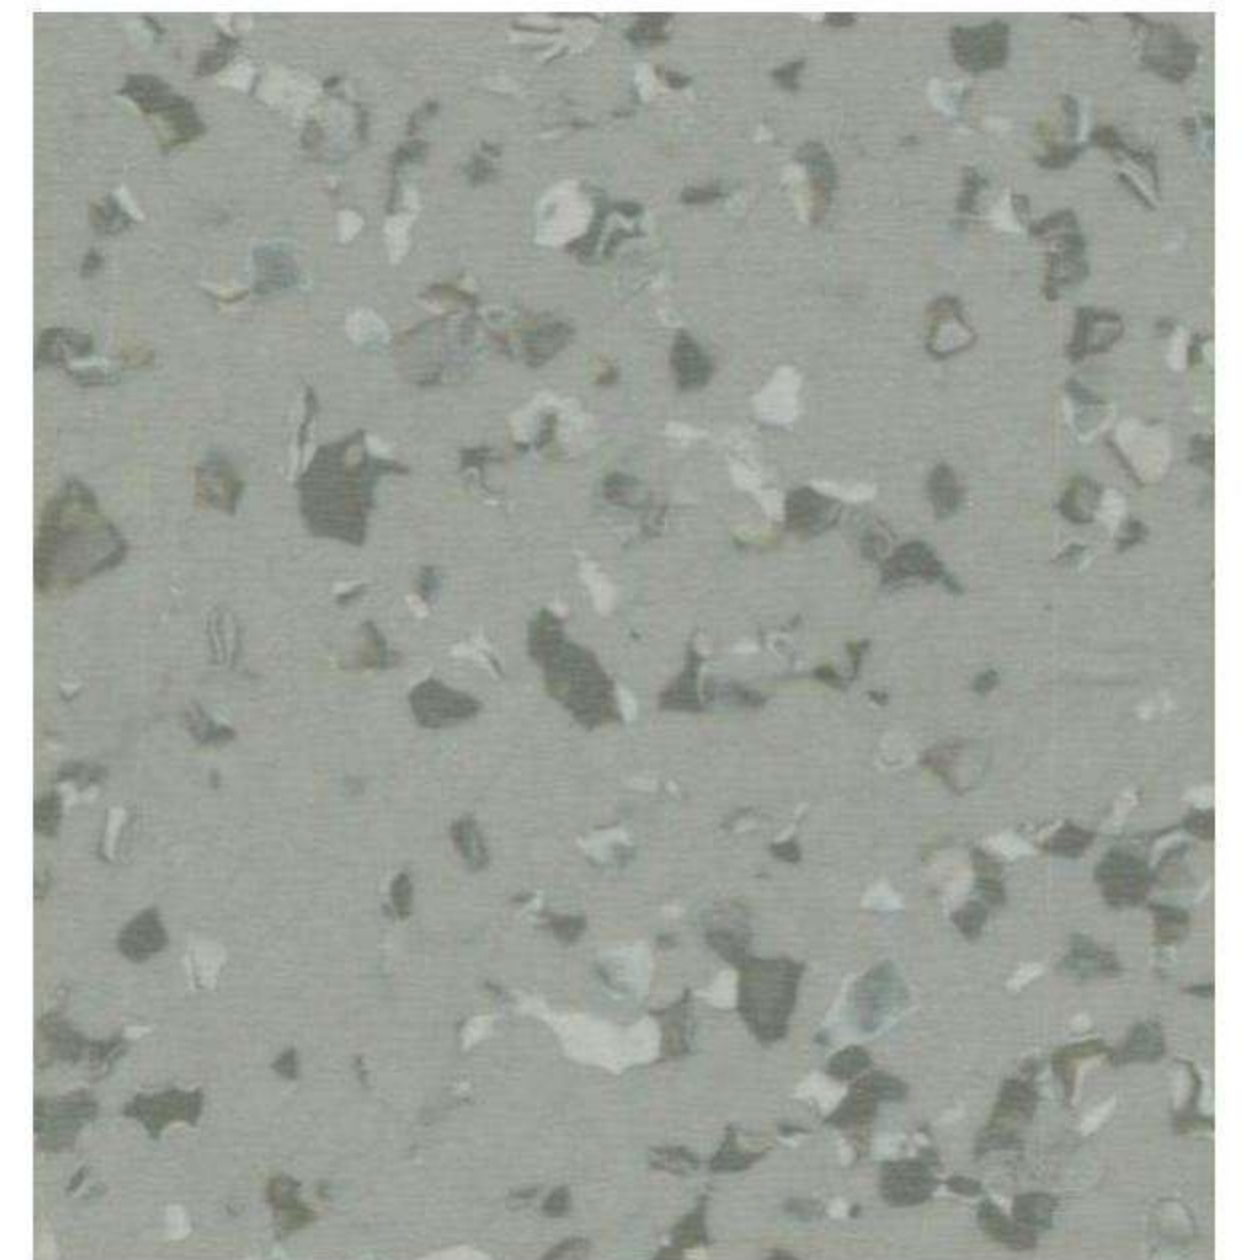


DS-7521

Mistletoe Gray

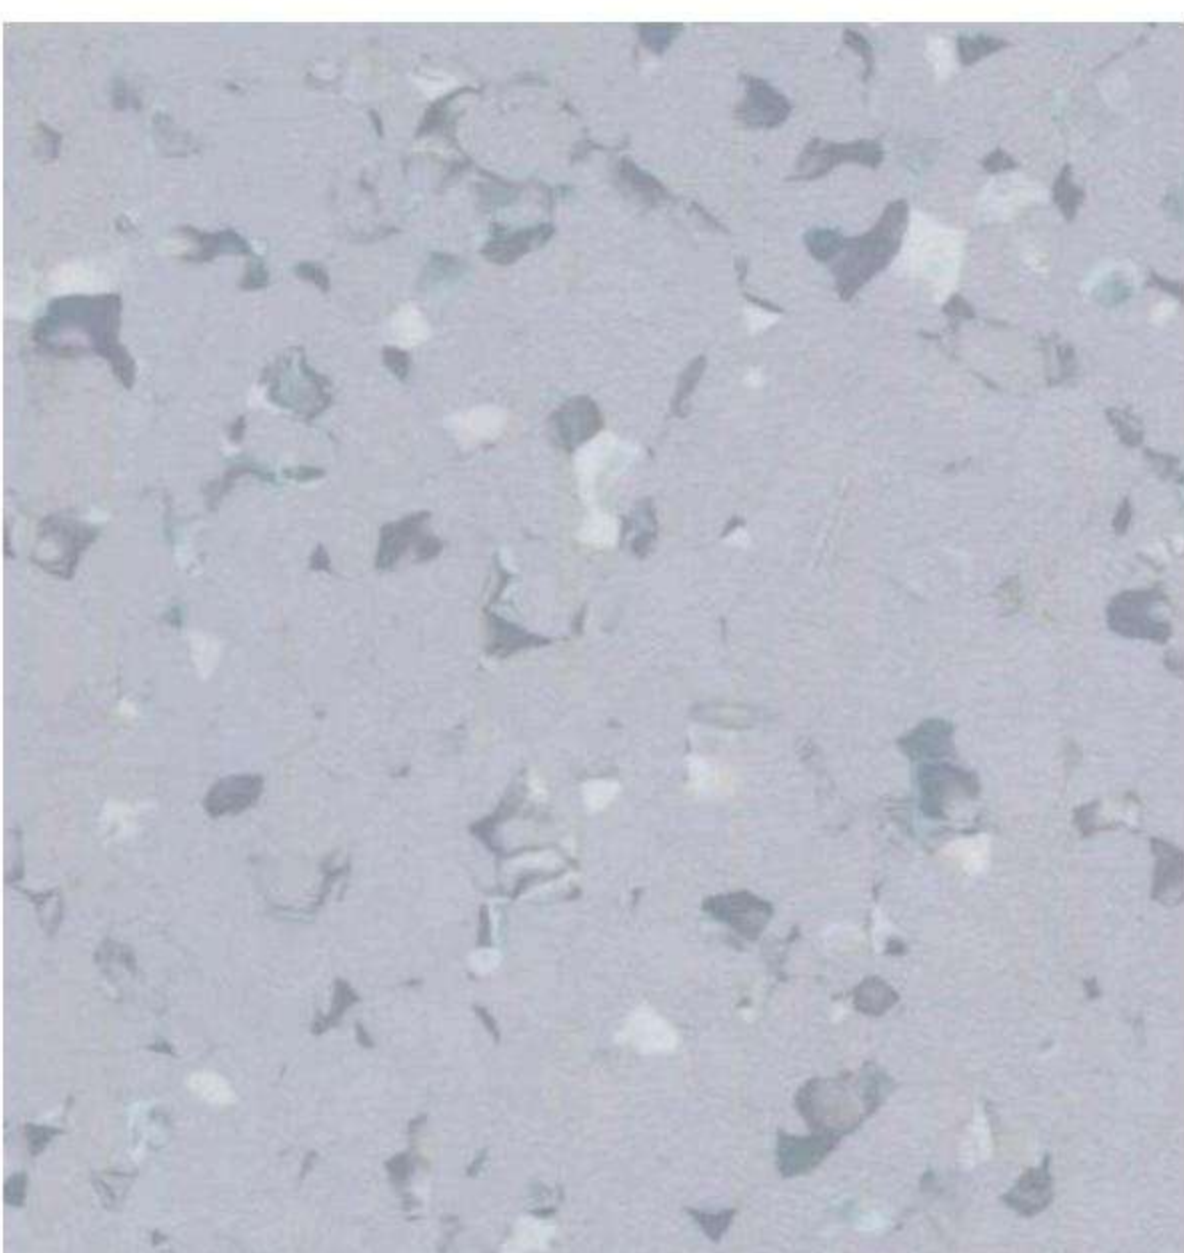


DS-7522

Lavender Gray

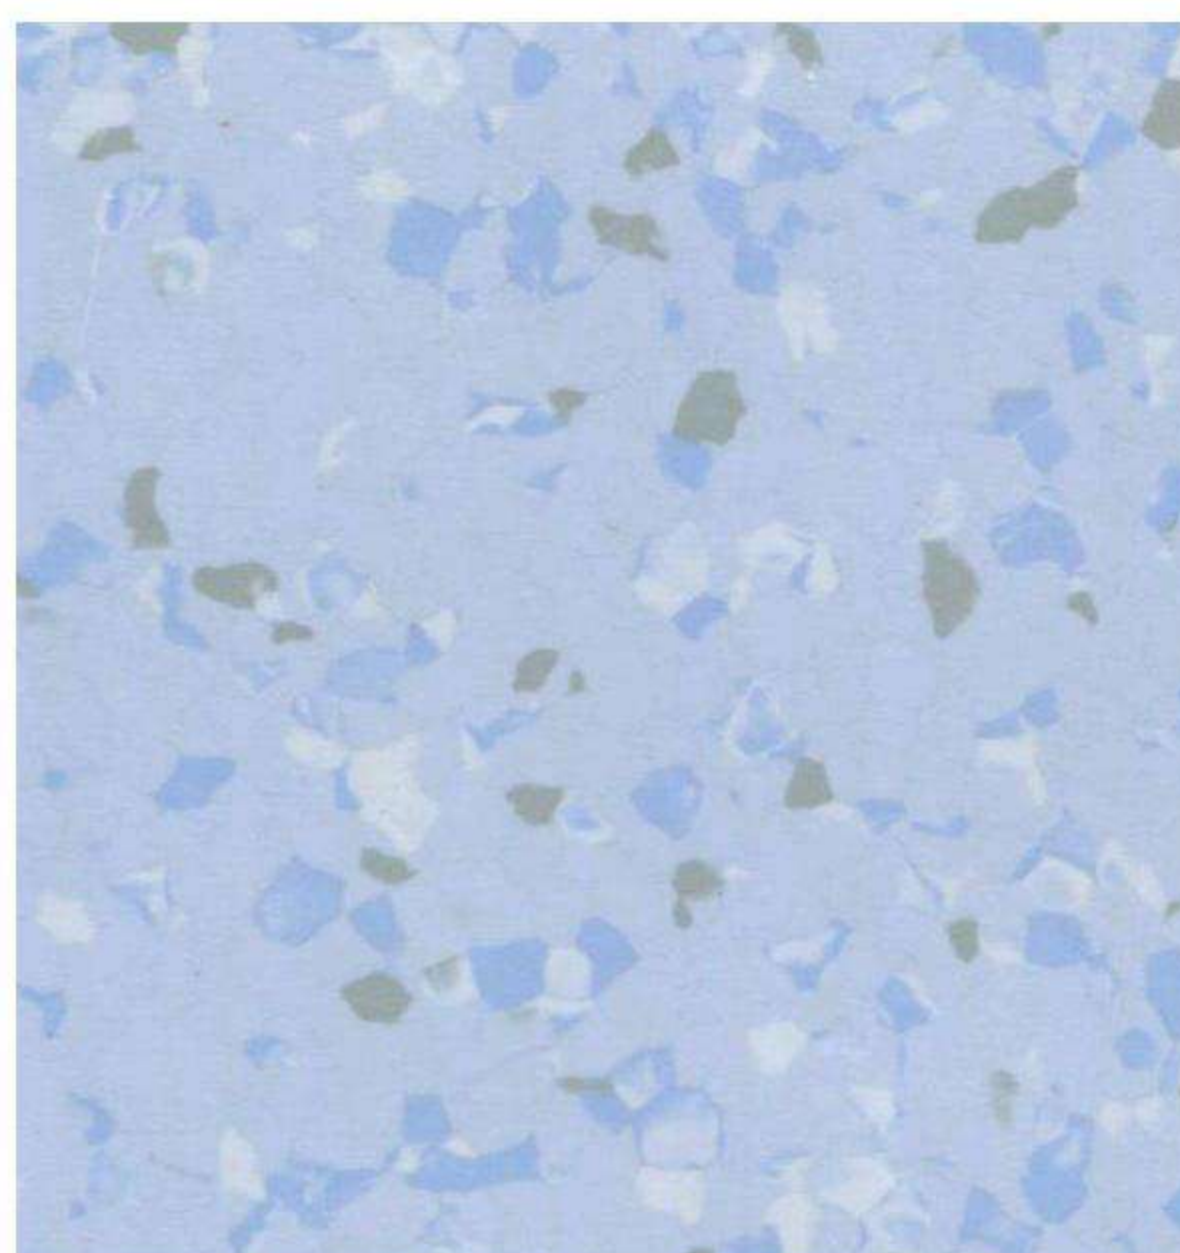

DS-7523

Sky Blue

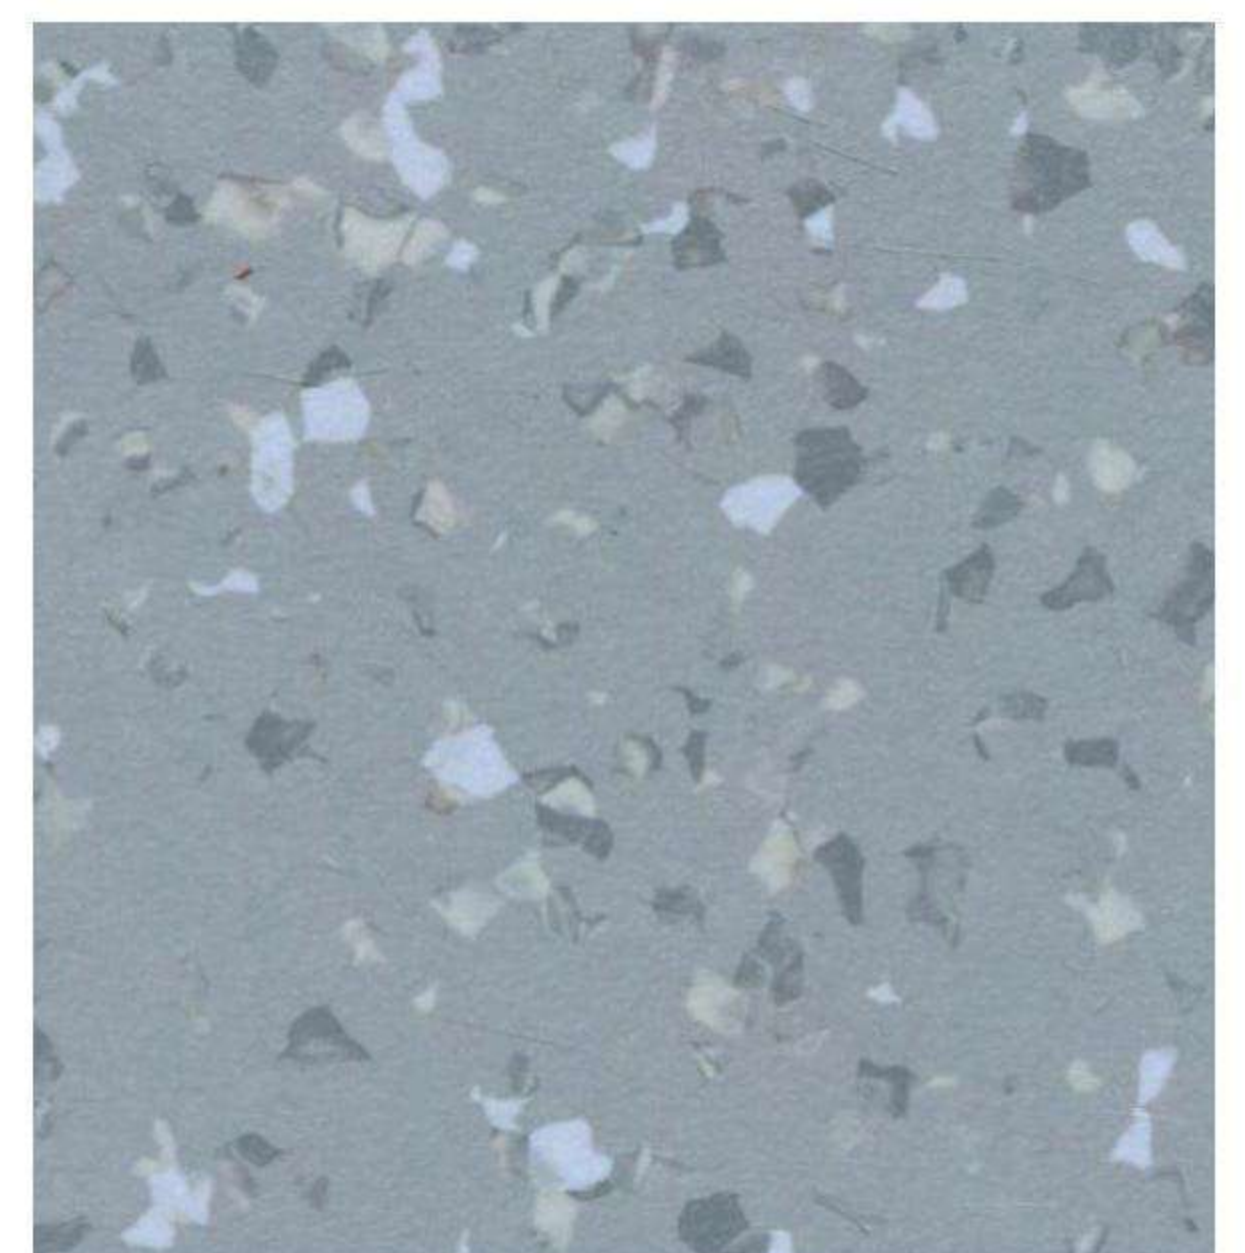

DS-7524

Dim Gray

DECOLUX™ SERENO



HOMOGENEOUS VINYL
Size:2.0mm x 2m x 20m




DS-6508 Cool Gray




DS-6509 Silver Foil




DS-6510 Raisin Black

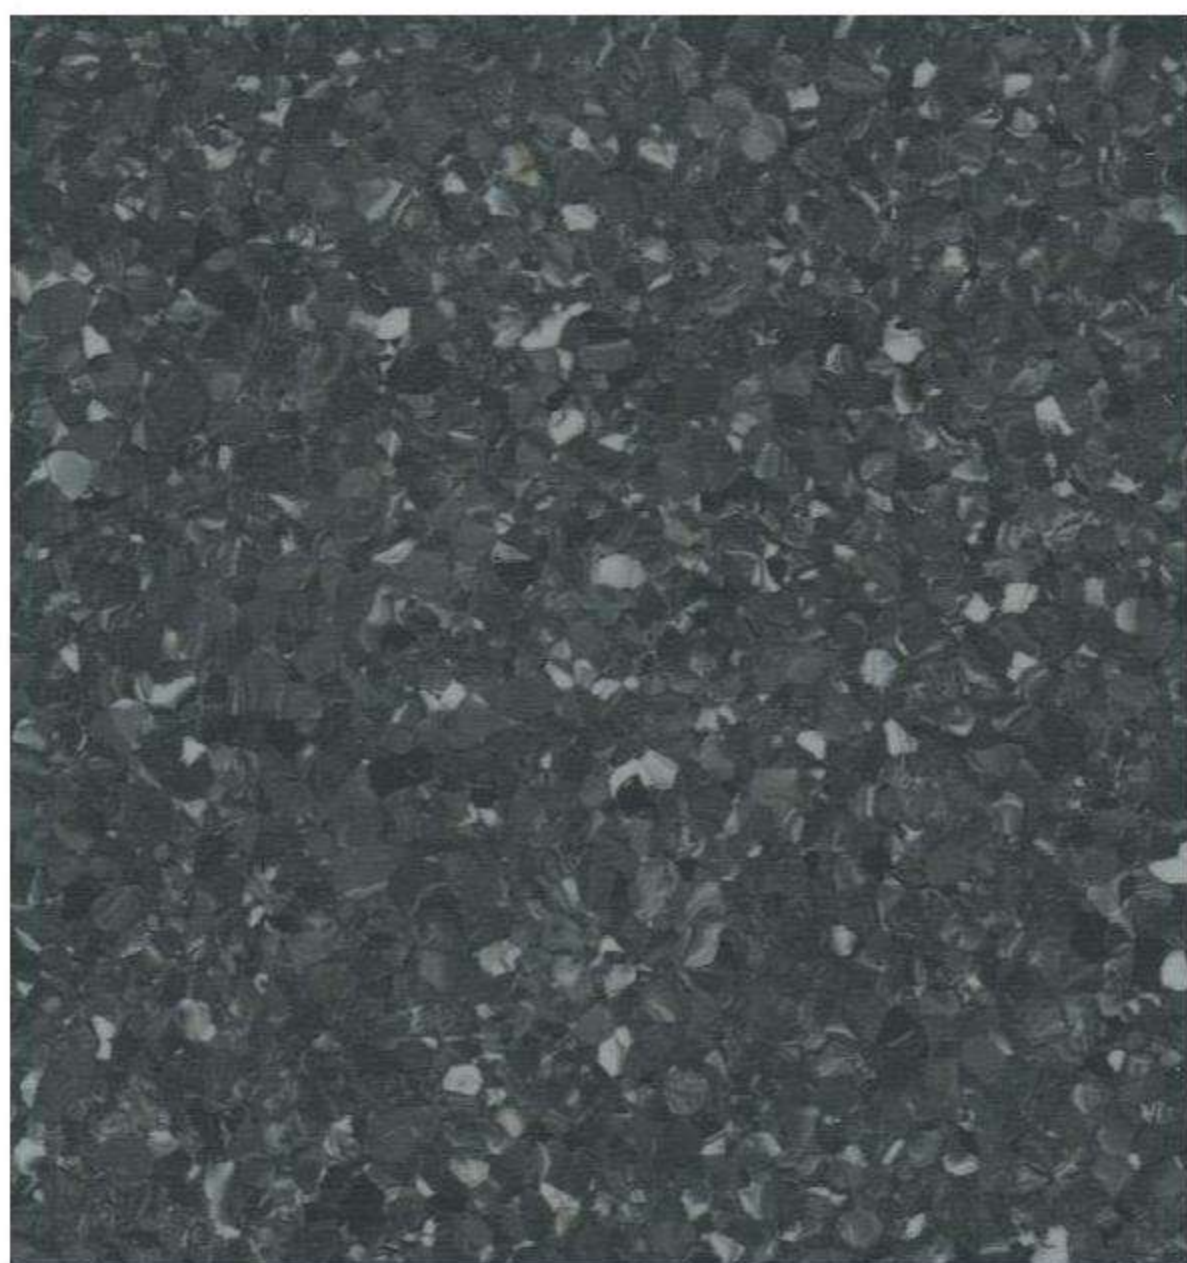


DS-6511 Eerie Black

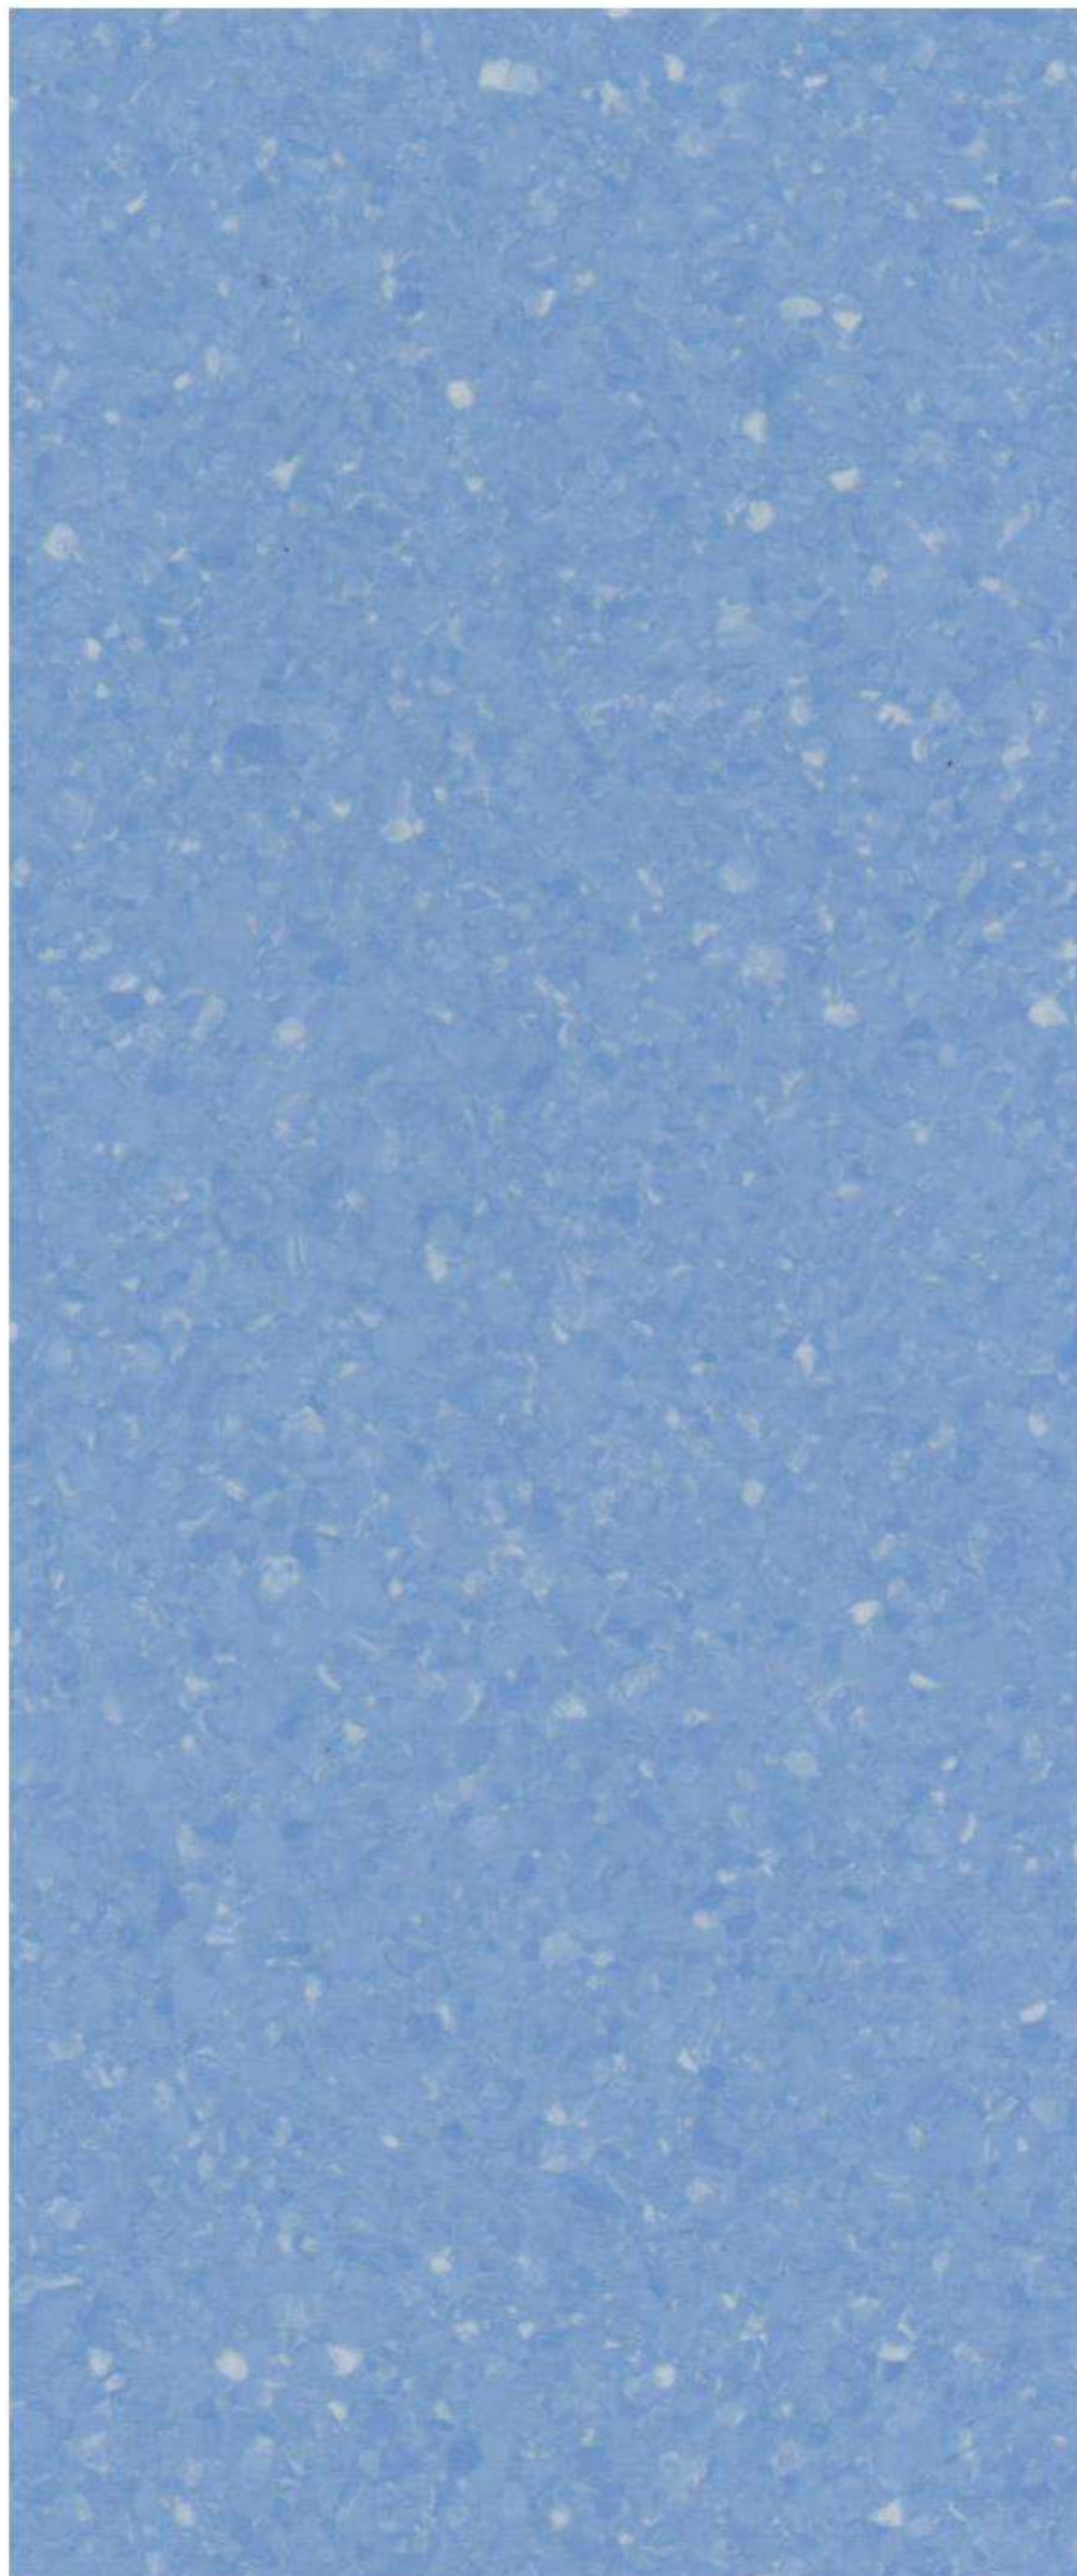


DS-6512 Silver Lake Blue

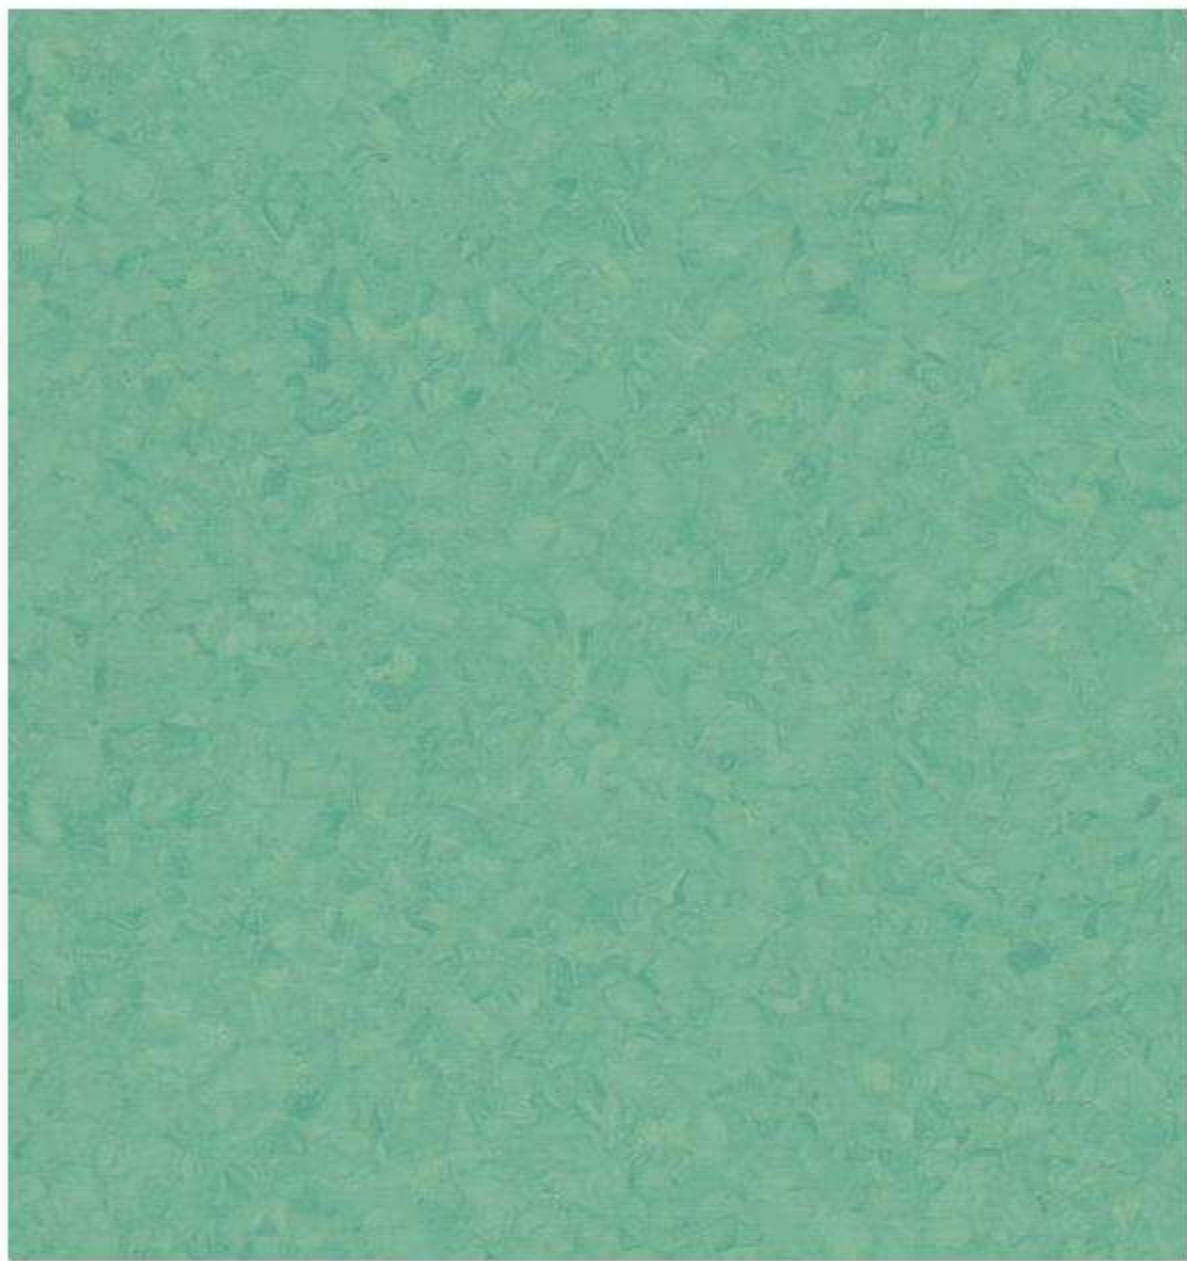


DS-6513 Old Moss Green

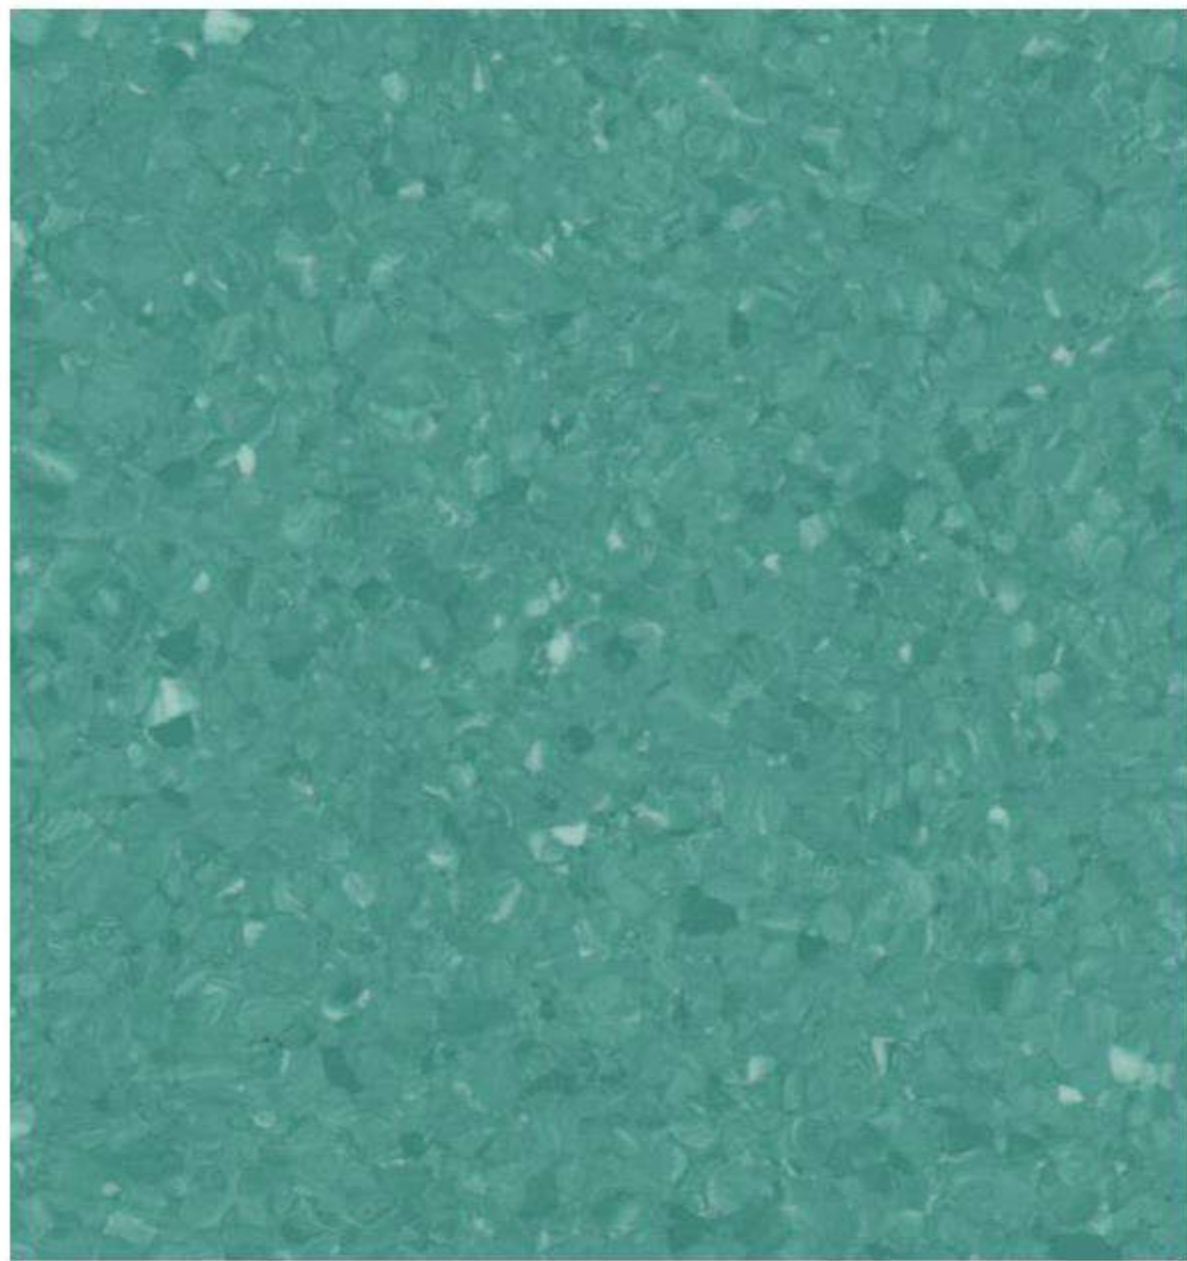

DS-6514 Lochinvar

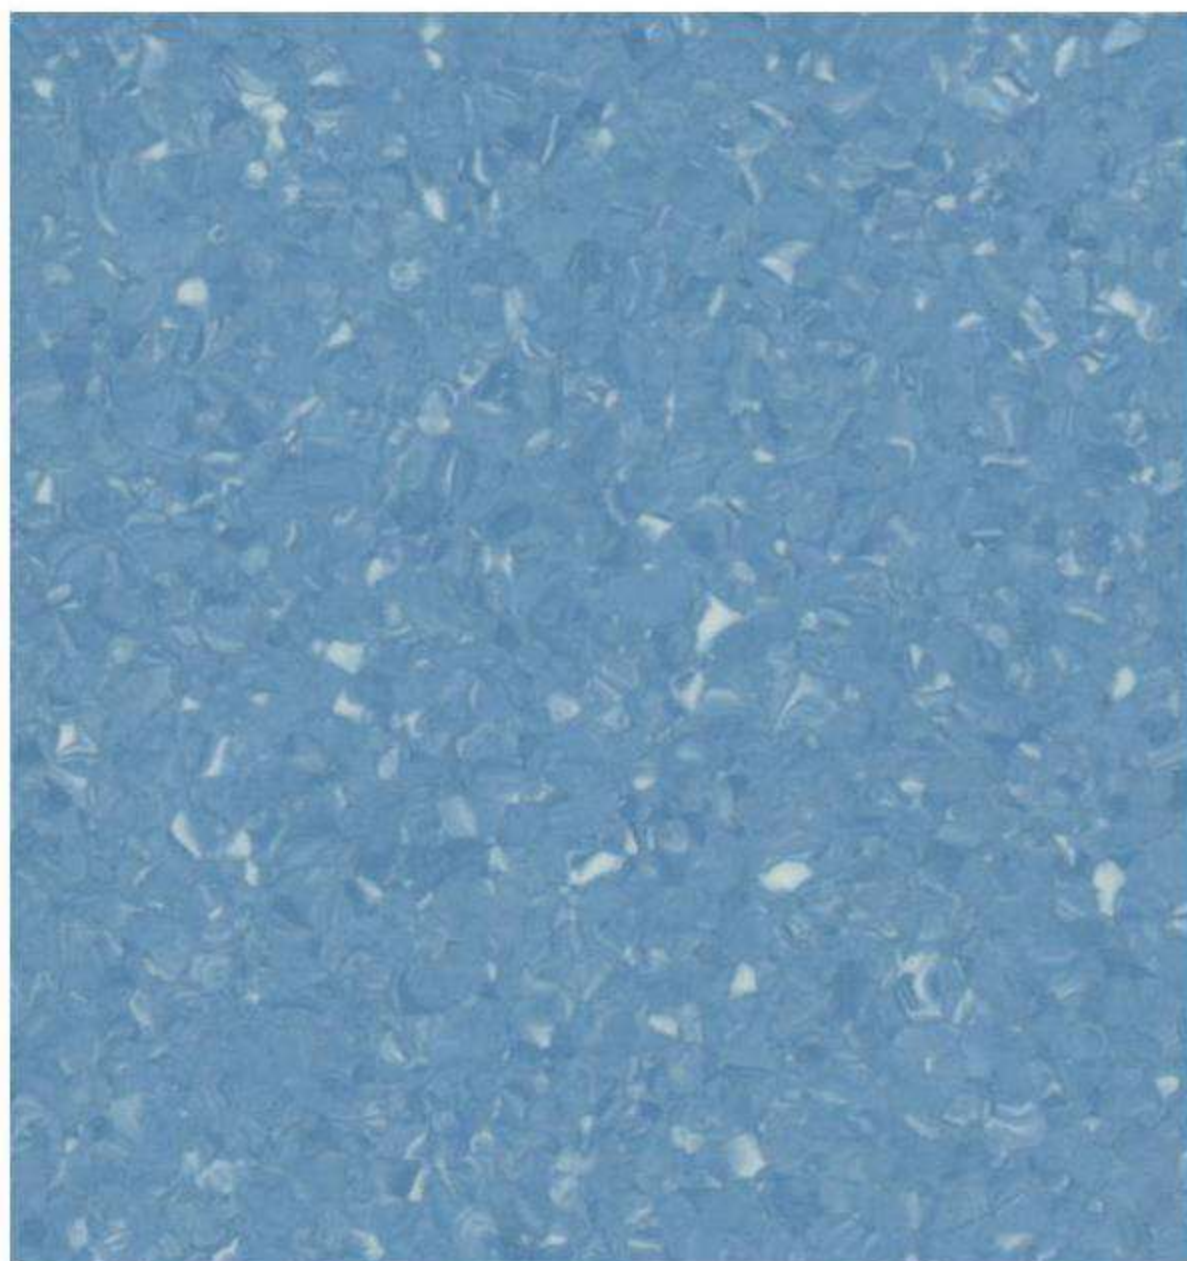

DS-6515 Moonstone Blue

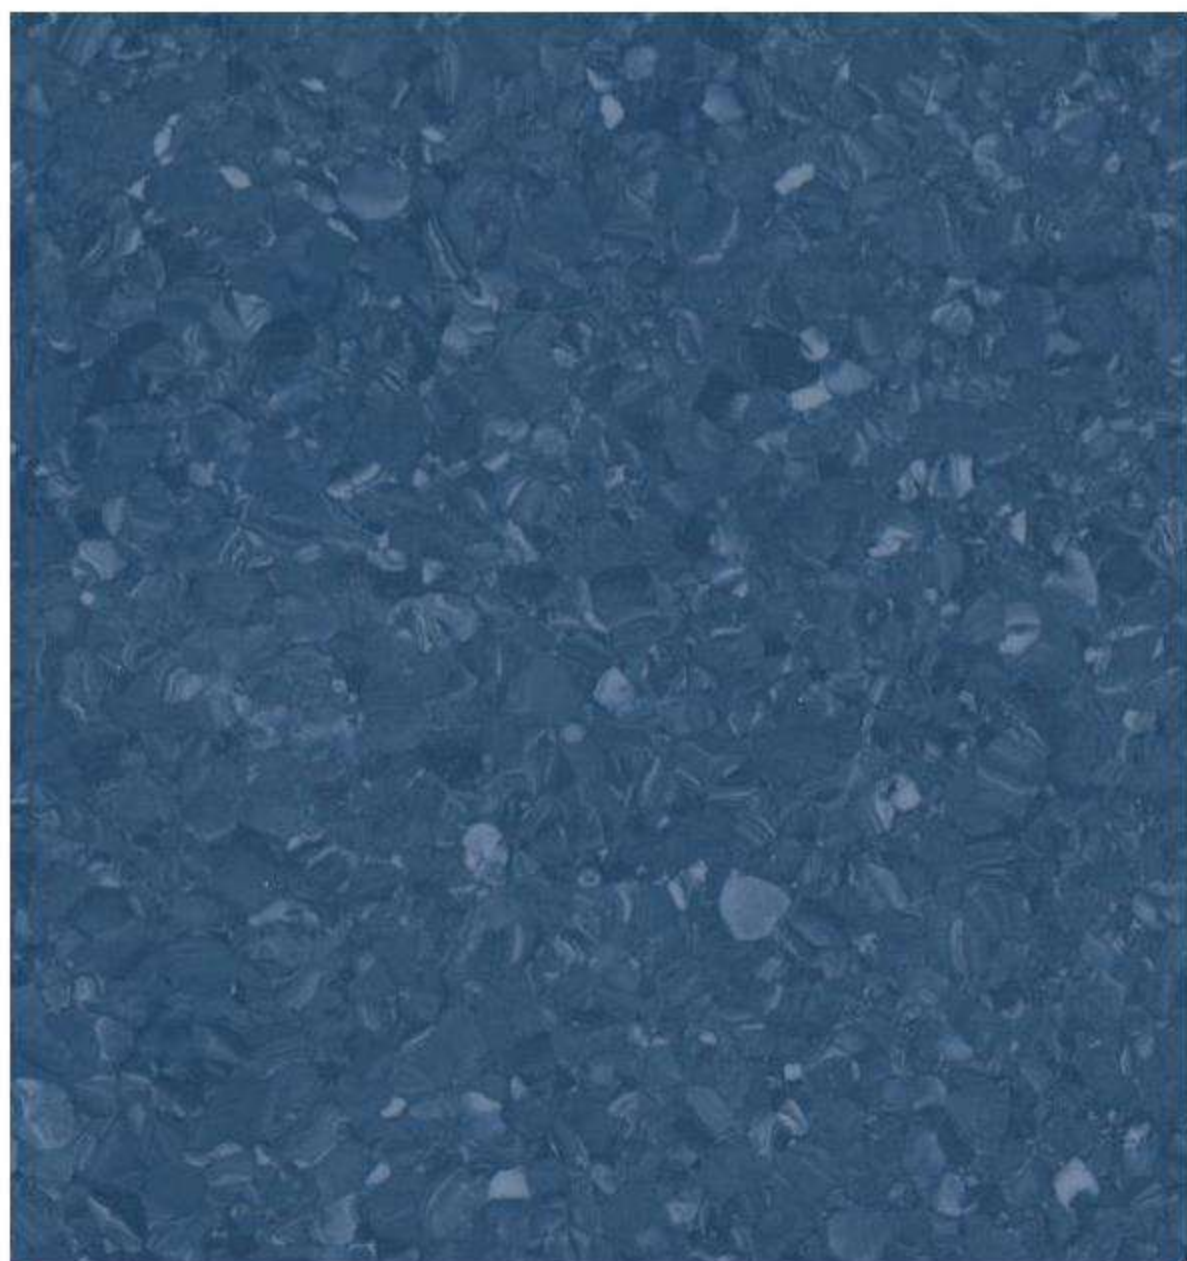

DS-6516 Kashmir Blue



DECOLUX™ SERENO



BETTER AIR QUALITY

- Lower emissions
- CE certificated



REACH

- REACH certificated
- No formaldehyde
- No heavy metals
- No DOP



RECYCLABLE

- The product is 100% recyclable
- Enviromentally friendly



HEALTH

- Anti-bacterial
- Excellent anti – slip performance
- Comfortable underfoot feeling and excellent acoustic performance

DECOLUX™ SERENO

HOMOGENEOUS VINYL



Unit 2309 Prestige Tower
F. Ortigas Jr. Rd. Ortigas Center
Pasig City, Philippines 1605
Landline : (632) 8635 0515
Mobile + 63 917 156 9669
www.obiasia.com

DESCRIPTION	STANDARD	UNIT	RESULT
Total thickness	ISO 24346 / EN 428	mm	2(2.5/3.0mm)
Width of sheet	ISO 24346 / EN 426	m	2
Length of sheet	ISO 24346 / EN 426	m	20
Type of floor covering	ISO 10581 / EN 649	-	Homogeneous Vinyl Flooring
CLASSIFICATION			
European classification	ISO 10784 / EN 685	class	34-43
Reaction to fire	EN 13501 - 1	class	Bfl-s1
	GB 8624 - 2012	-	B1(B-s1,t0)
Toxic testing	GB 18586 - 2001	-	Qualified
Static electrical propensity	EN 1815	KV	≤2
Slip resistance	DIN 51130	class	R9
PERFORMANCES			
Type binder content	ISO 10581 / EN 649	type	II
Dimensional stability	ISO 23999 / EN 434	%	≤0.4
Residual indentation	ISO 24343-1 / EN 425	mm	≤0.1 (≈0.05)
Flexibility	ISO 24344 / EN 435	-	No Cracking
Thermal conductivity	ISO 10456 / EN 12524	W/(m.k)	≈0.25
Castor chair test	ISO 4918 / EN 425	-	OK
Colour fastness to light	ISO 105 - B02	degree	≥6
Chemical resistance	ISO 26987 / EN 423	-	Very good
Bacteria resistance	ISO 846 - 2019	-	Does not support growth
Seam strength	GB/T11982.2-2015	-	≥240N/50mm
Formaldehyde emission	EN 14041:2004	-	ND
Phthalate content test	EN 14372:2004	-	Free of DBP/BBP/DOP/DIVP/DNOP/DIDP
Surface treatment	DuraCare™		
Logistics information	2mx20mx2.0mm 16 Rolls/Pallet 10Pallets/6400m²		

ADVANTAGES

Eco-Friendly

Easy Maintenance

Super Wear-resistant

Anti-slip

Sound Absorbing

Anti-bacterial

APPLICATION

Healthcare

Education

Offices

Shopping Malls

Transportation

Factories

*The sample is only used as a reference for color selection. The color may slightly different from the actual samples.

*The above technical parameters are typical test results under laboratory standard test conditions.

*If you have special requirements for a certain technical parameter, please discuss the specific details with our company when ordering.

