

FLORMAX™ NATURA

LUXURY VINYL TILE

*Inspiration
From
Nature*



FN-L801



FN-L802



FN-L803



FN-L804



FN-L805



FN-L806



FN-L807



FN-L808



FN-L809



FN-L810



FN-L811



FN-L812



FN-L810

Size:

 184.15 × 1219.2mm

Thickness / Wear Layer:

 2.0mm/ 0.2mm

Packaging:

 24 pcs / BOX



FN-L813



FN-L814



FN-L815



FN-L816



FN-L817




FN-L818



FN-L819



FN-L820

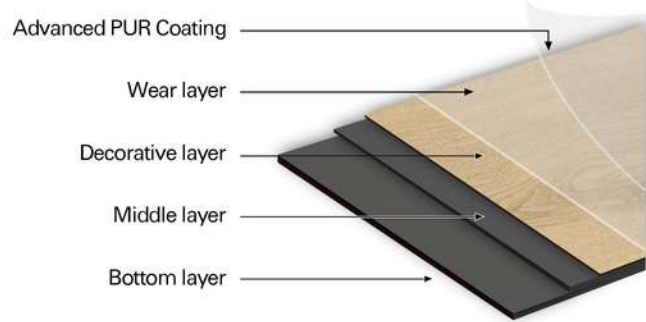

Cost-effective



Anti-slip



Reduce noise



Super matte
with natural look



Super
wear-resistant



Easy maintenance
and replacement



Comfortable
foot feeling




Glue-down installation
provides super stability
for large area



Eco-friendly
& Healthy

Looselay

Luxury Vinyl Tile

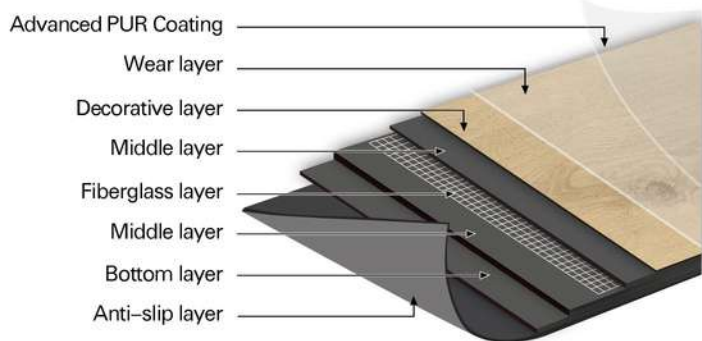

Easy
maintenance



Super
wear-resistant



Super matte
treatment



Comfortable
foot feeling



Noise reduction



Excellent
dimensional stability



Anti-slip special
backing



Easy installation
without full glue



Renovation friendly

FLORMAXTM NATURA

LUXURY VINYL TILE

TECHNICAL DATA

Description	Standard	Result
Total thickness	EN 428	2.0 / 2.5 / 3.0 mm
Wear layer thickness	EN 429	0.2 / 0.3 / 0.3mm
Size	EN 427	184.15 x 1219.2 mm
Surface treatment		PUR
Performance		
Dimensional stability	EN 434	≤ 0.12%
Squareness & straightness	GB/T 4085	≤ 0.20mm
Curling	ISO 23999	≤ 1.20mm
Peel resistance	ISO 24345	≥ 65 N/50 mm
Fire rating	EN 13 501-1	Bf-s1
Residual indentation	EN 433	≤ 0.10mm
Wear group	EN 13329	T
Furniture chair foot test	EN 424	OK
Castor chair test	EN 425	OK
Anti - slip grade	DIN 51 130	R10
Coefficient of friction	BS 7976	Dry method: 86
		Wet method: 30
Thermal resistance	EN ISO 10456	0.02 m² · K/W
Color fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN ISO 26987	(Grade 5) Highest grade
Environmental Parameters		
Vinyl chloride monomer content	GB 18586	ND
Volatile matter content	GB 18586	ND
Heavy metals	GB 18586	ND



SGS



MA



CNAS



ISO9001



ASTM



CE



Emissions in indoor air

APPLICATION



Office



Hotel



Store



Education



Showroom



Yoga studio



Gym